


# K-WTST SAFETY BKR SCHA AN FILR MULT

SAFETY service unit sets, comprising a ball valve with silencer, start-up valve and filter regulator with lock cylinder

**HANSA FLEX**

## Vlastnosti

|                              |  |
|------------------------------|--|
| Tlak na vstupu               | 2 - 16 bar   |
| Tlak na výstupu              | 0.5 - 10 bar   |
| Teplotní rozsah              | Max. 60 °C   |
| Média                        | Stlačený plyn  |
| Těsnicí materiál             | Nitrilkaučuk   |
| Nádoba                       | Polycarbonate (with bayonet lock) and bowl guard               |
| Kryt pružiny                 | POM  |
| Filtrační prvek              | Cellpor (PE) 5 µm  |
| Pouzdro                      | Die-cast zinc  |
| Membrána                     | NBR  |
| Drain valve                  | Semi-automatic   |
| Měření hodnoty průtoku       | At P1 = 8 bar, P2 = 6 bar and pressure drop $\Delta p = 1$ bar |
| Další údaje                  | see data sheets of the individual components (on request)      |
| Připoj odvětr. Kulový kohout | Silencer   |

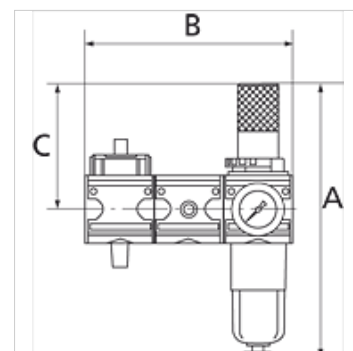

## Popis

These compressed air service unit sets, comprising a ball valve with silencer, a start-up valve and one out of a pressure regulator, filter regulator or service unit, meet even the strictest requirements for operating reliability and accident prevention!

## Upozornění k objednávkám

The price does not include a padlock. Please order separately. For accessories and spare parts, refer to individual components: ball valve, start-up valve, pressure regulator, filter regulator, 2-piece service unit.

## Výrobek

| Označení       | Závit | Průtok (L/min) | A (mm) | B        | C (mm) | Vypouštění kondenzátu |
|----------------|-------|----------------|--------|----------|--------|-----------------------|
| K- 07 25 15 14 | G 1/4 | 1000           | 219,1  | 137,8 mm | 94,0   | Semi-automatic        |
| K- 07 25 15 15 | G 1/2 | 4000           | 269,3  | 200,8 mm | 122,0  | Semi-automatic        |
| K- 07 25 15 16 | G 1   | 12000          | 410,8  | 282,8 mm | 157,0  | Semi-automatic        |