
K-SCHALLDAE FRUEHWARNFUKT

Silencers with early warning function

Vlastnosti

Provozní tlak	5 bar
Provozní teplota	Max. 70 °C
Norma	G thread acc. to DIN EN ISO 228-1
Materiál	PP



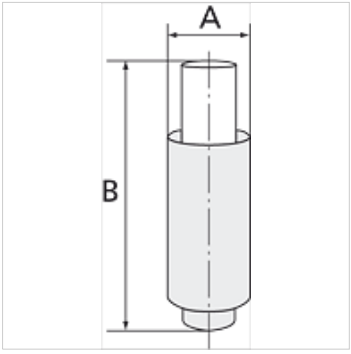

Upozornění

Další údaje na dotaz.

Popis

The silencer’s warning indicator gives an early warning if the back pressure in the system is too high. Maintenance personnel can both see and hear (from the elevated sound level) that it is time to replace the silencer before costly and unnecessary disruptions impair operation.
The design is based on a two-chamber system with inner and outer silencing chambers.
The inner diffuser serves as a warning indicator that is pressed out when back pressure is too high.
The silencer should be replaced as soon as the inner diffuser extends far enough to show the red marking on the warning indicator.

Výrobek

Označení	Závit	A (mm)	B (mm)	Průtok (L/min)	Hladina hluku (dBA)	Snížení hlučnosti
K- 07 40 15 22	G 1/8 male	15,7	35,5	450	65,5	32 dB(A)
K- 07 40 15 23	G 1/4 male	19,6	42,6	883	66,5	33 dB(A)
K- 07 40 15 24	G 3/8 male	26,8	57,0	1480	73,2	30 dB(A)
K- 07 40 15 25	G 1/2 male	32,4	73,5	1910	76,5	33 dB(A)

Navzdory nejpečlivější kontrole nemůžeme vyloučit chyby a nepřejímáme žádnou záruku za obsažené údaje.