
K-T-VB PP
Union tees

Vlastnosti

Pracovní tlak	on request
Provozní teplota	Max. +20 °C
Materiál	Polypropylene (PP)
Těsnicí materiál	Nitrilkaučuk



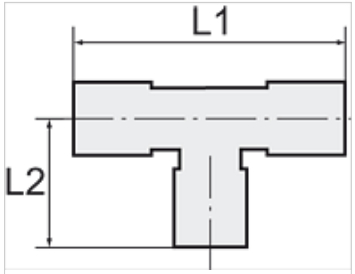

Upozornění

Další údaje na dotaz.

Popis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Výrobek

Označení	pro vnější Ø hadice	L1 (mm)	L2 (mm)
K- 07 40 28 73	32 mm	199,4	99,7

Navzdory nejpečlivější kontrole nemůžeme vyloučit chyby a nepřejímáme žádnou záruku za obsažené údaje.