


# K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

**HANSA FLEX**

## Vlastnosti

Tlak na vstupu	Max. 10 bar
Teplotní rozsah	-10 °C to +50 °C
Média	Stlačený plyn
Stupeň krytí	IP 65
Pracovní tlak	0.5 - 8 bar
Tlakový spínač	Changeover contact
Šířka póru ve filtrační vložce	20 µm
Měření hodnoty průtoku	At 6,3 bar and $\Delta p = 1$ bar

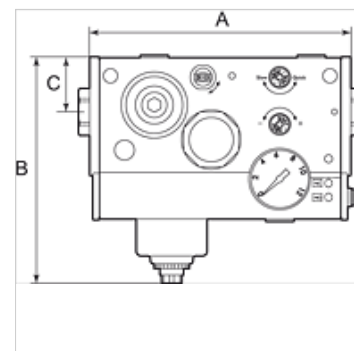

## Upozornění

Další údaje na dotaz.

## Popis

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

## Upozornění k objednávkám

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

## Výrobek

Označení	Přípoj	Průtok (L/min)	A (mm)	B	C (mm)	Napětí
K- 07 25 13 79	G 1/4	2400	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 80	G 3/8	3300	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)
K- 07 25 13 81	G 1/2"	4000	165,5	144,0 mm	35,0	24 V DC (for valves and pressure switch)