


K-XVM ZYL OR PP

Male connectors, parallel male thread with O-ring

HANSA FLEX

Vlastnosti

| | |
|------------------|--------------------|
| Pracovní tlak | on request |
| Provozní teplota | Max. +20 °C |
| Materiál | Polypropylene (PP) |
| Těsnicí materiál | Nitrilkaučuk |

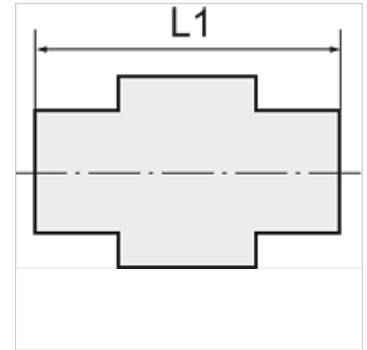

Upozornění

Další údaje na dotaz.

Popis

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Výrobek

| Označení | Závit | pro vnější Ø hadice | L1 (mm) | SW |
|----------------|---------|---------------------|------------|-------|
| K- 07 40 28 39 | G 1 | 32 mm | 111,4 | 46 mm |
| K- 07 40 28 40 | G 1 1/2 | 32 mm | 109,2 | 49 mm |