


## Eigenschaften

|                    |                        |
|--------------------|------------------------|
| <b>Anschluss 1</b> | UN/UNF-Innengewinde    |
| <b>Bauart</b>      | Kontermutter           |
| <b>Norm</b>        | ISO 8434-2             |
| <b>Werkstoff</b>   | Stahl                  |
| <b>Oberfläche</b>  | galvanisch beschichtet |

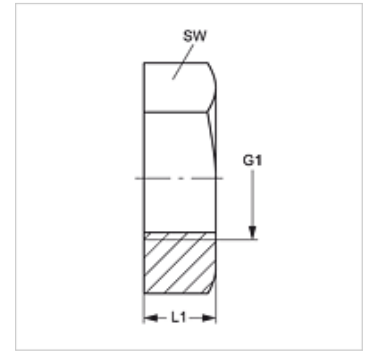

## Artikel

| Bezeichnung      | G1             | L1<br>(mm) | SW<br>(mm) |
|------------------|----------------|------------|------------|
| <b>KM 04 UNF</b> | 7/16" -20 UNF  | 6,4        | 17         |
| <b>KM 05 UNF</b> | 1/2" -20 UNF   | 6,4        | 19         |
| <b>KM 06 UNF</b> | 9/16" -18 UNF  | 6,9        | 22         |
| <b>KM 08 UNF</b> | 3/4" -16 UNF   | 7,9        | 24         |
| <b>KM 10 UNF</b> | 7/8" -14 UNF   | 9,1        | 30         |
| <b>KM 12 UNF</b> | 1.1/16" -12 UN | 10,4       | 36         |
| <b>KM 16 UNF</b> | 1.5/16" -12 UN | 10,4       | 41         |
| <b>KM 20 UNF</b> | 1.5/8" -12 UN  | 10,4       | 50         |
| <b>KM 24 UNF</b> | 1.7/8" -12 UN  | 10,4       | 55         |
| <b>KM 32 UNF</b> | 2.1/2" -12 UN  | 10,4       | 70         |

SW = Schlüsselweite