


Eigenschaften

| | |
|--------------|-------------------------|
| Druckreihe | 6000 psi |
| Norm | SAE J 518 C ISO 6162 |
| Bauform | gerade |
| Bauart | SAE-Blindteller |
| Lieferumfang | nur Blindteller |
| Werkstoff | Stahl 9SMnPb28K / C15 |
| Oberfläche | galvanisch beschichtet |

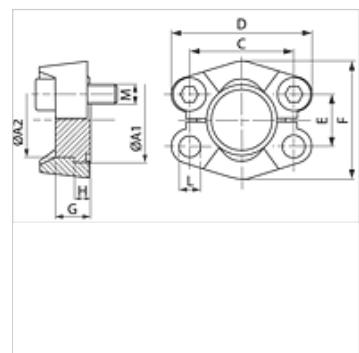

Artikel

| Bezeichnung | PB 10.9 (bar) | Baugröße | A1 (mm) | A2 (mm) | G (mm) | C (mm) | D (mm) | E (mm) | F (mm) | H (mm) | L (mm) |
|----------------|------------------|----------|------------|------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| BS 6001 | 400 | 1/2" | 31,8 | 24,0 | 14 | 40,5 | 56 | 18,2 | 48 | 7,8 | 8,7 |
| BS 6002 | 400 | 3/4" | 41,3 | 31,8 | 15 | 50,8 | 71 | 23,8 | 60 | 8,8 | 10,7 |
| BS 6003 | 400 | 1" | 47,6 | 38,0 | 16 | 57,2 | 81 | 27,8 | 70 | 9,5 | *1 |
| BS 6004 | 400 | 1.1/4" | 54,0 | 44,0 | 16 | 66,6 | 95 | 31,8 | 78 | 10,3 | *2 |
| BS 6005 | 400 | 1.1/2" | 63,5 | 50,8 | 19 | 79,3 | 113 | 36,5 | 95 | 12,6 | 17,0 |
| BS 6006 | 400 | 2" | 79,4 | 67,0 | 30 | 96,8 | 133 | 44,5 | 114 | 12,6 | 21,0 |

PN = Nenndruck PB = max. Betriebsdruck

*1) = wahlweise 12,0 oder 12,5 – *2) = wahlweise 13,5 oder 14,5