

Eigenschaften

Anschluss 1 BSP-Außengewinde zylindrisch

Dichtform 1 Form A


Bauart Verschluss-Schrauben, mit Außensechskant

Bauform gerade

Norm DIN 910

Werkstoff Stahl

Oberfläche galvanisch beschichtet

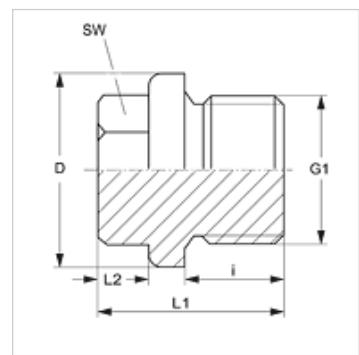

Artikel

| Bezeichnung | G1 | i (mm) | D (mm) | L1 (mm) | L2 (mm) | SW (mm) |
|---------------------|--------------|-----------|-----------|------------|------------|------------|
| FHR 91-1/8 | G 1/8" -28 | 8 | 14 | 17 | 6 | 10 |
| FHR 91-1/4 | G 1/4" -19 | 12 | 18 | 21 | 6 | 13 |
| FHR 91-3/8 | G 3/8" -19 | 12 | 22 | 21 | 6 | 17 |
| FHR 91-1/2 | G 1/2" -14 | 14 | 26 | 26 | 8 | 19 |
| FHR 91-5/8 | G 5/8" -14 | 14 | 28 | 26 | 8 | 19 |
| FHR 91-3/4 | G 3/4" -14 | 16 | 32 | 30 | 10 | 24 |
| FHR 91-1 | G 1" -11 | 16 | 39 | 32 | 11 | 27 |
| FHR 91-1 1/4 | G 1 1/4" -11 | 16 | 49 | 33 | 12 | 30 |
| FHR 91-1 1/2 | G 1 1/2" -11 | 16 | 55 | 33 | 12 | 30 |