

Eigenschaften

Anschluss 1 NPT-Innengewinde

Dichtform 1 gewindedichtend


Anschluss 2 NPT-Innengewinde

Dichtform 2 gewindedichtend

Bauart Verbindungs-Stutzen

Bauform gerade

Werkstoff Edelstahl

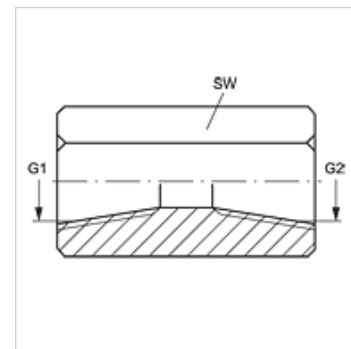

Artikel

| Bezeichnung | G1 | G2 | SW (mm) |
|----------------------|--------------|--------------|------------|
| G IN 02 VA | 1/8" -27 NPT | 1/8" -27 NPT | 16 |
| G IN 04 VA | 1/4" -18 NPT | 1/4" -18 NPT | 19 |
| G 06 IN 04 VA | 3/8" -18 NPT | 1/4" -18 NPT | 22 |
| G IN 06 VA | 3/8" -18 NPT | 3/8" -18 NPT | 22 |
| G 08 IN 06 VA | 1/2" -14 NPT | 3/8" -18 NPT | 29 |
| G IN 08 VA | 1/2" -14 NPT | 1/2" -14 NPT | 30 |
| G 12 IN 04 VA | 3/4" -14 NPT | 1/4" -18 NPT | 35 |
| G IN 12 VA | 3/4" -14 NPT | 3/4" -14 NPT | 36 |
| G IN 16 VA | 1" -11,5 NPT | 1" -11,5 NPT | 41 |

SW = Schlüsselweite

Produktvarianten

G IN Verbindungs-Stutzen, Stahl