

T HB VA

Verbindungs-Stutzen, T-Form

HANSA FLEX

Eigenschaften


Anschluss 1 - 3 BSP-Außengewinde zylindrisch

Dichtform 1 - 3 60° Innenkonus

Bauart Verbindungs-Stutzen

Bauform T-Form

Werkstoff Edelstahl

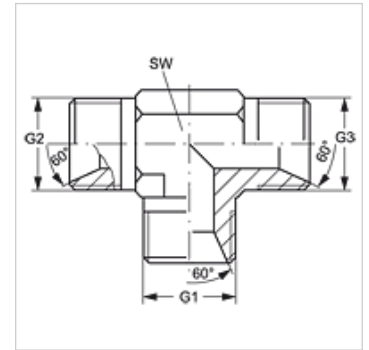

Artikel

| Bezeichnung | G1 - G3 | SW (mm) |
|-------------|--------------|------------|
| T HB 02 VA | G 1/8" -28 | 11 |
| T HB 04 VA | G 1/4" -19 | 14 |
| T HB 06 VA | G 3/8" -19 | 19 |
| T HB 08 VA | G 1/2" -14 | 22 |
| T HB 12 VA | G 3/4" -14 | 27 |
| T HB 16 VA | G 1" -11 | 33 |
| T HB 20 VA | G 1.1/4" -11 | 41 |
| T HB 24 VA | G 1.1/2" -11 | 48 |
| T HB 32 VA | G 2" -11 | 64 |

SW = Schlüsselweite

Produktvarianten

T HB Verbindungs-Stutzen, T-Form, Stahl