

Eigenschaften

Anschluss 1 - 3 BSP-Innengewinde zylindrisch

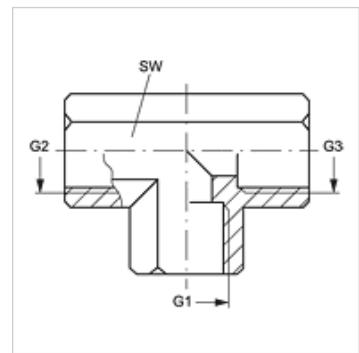
Dichtform 1 - 3 Form A

Bauart Aufschraub-Stutzen

Bauform T-Form

Werkstoff Stahl

Oberfläche galvanisch beschichtet

**Artikel**

| Bezeichnung | G1 - G3 | SW (mm) |
|----------------|--------------|------------|
| T IR 02 | G 1/8" -28 | 14 |
| T IR 04 | G 1/4" -19 | 19 |
| T IR 06 | G 3/8" -19 | 22 |
| T IR 08 | G 1/2" -14 | 27 |
| T IR 12 | G 3/4" -14 | 33 |
| T IR 16 | G 1" -11 | 41 |
| T IR 20 | G 1 1/4" -11 | 50 |
| T IR 24 | G 1 1/2" -11 | 60 |
| T IR 32 | G 2" -11 | 70 |

SW = Schlüsselweite