
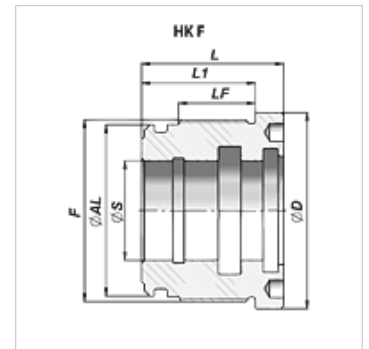


Eigenschaften

Werkstoff Stahlguss UNI 5007-G26

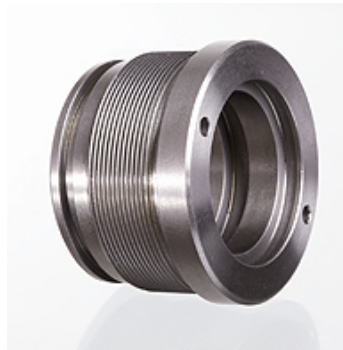

Artikel

| Bezeichnung | Ø A (mm) | Ø D (mm) | Ø S (mm) | F | L (mm) | L1 (mm) | Gewicht (kg) | passender Dichtsatz |
|--------------|-------------|-------------|-------------|----------|-----------|------------|-----------------|---------------------|
| HK F 32 16 | 32 | 40 | 16 | M 36x1,5 | 40 | 32 | 1,0 | HK DSF 32 16 |
| HK F 40 28 | 40 | 50 | 28 | M 44x1,5 | 40 | 32 | 1,0 | HK DSF 40 28 |
| HK F 40 30 | 40 | 50 | 30 | M 44x1,5 | 40 | 32 | 1,0 | HK DSF 40 30 |
| HK F 45 20 | 45 | 55 | 20 | M 49x1,5 | 40 | 32 | 1,0 | HK DSF 45 20 |
| HK F 45 30 | 45 | 55 | 30 | M 49x1,5 | 40 | 32 | 1,0 | HK DSF 45 30 |
| HK F 50 28 | 50 | 60 | 28 | M 54x1,5 | 43 | 35 | 1,2 | HK DSF 50 28 |
| HK F 63 25 | 63 | 73 | 25 | M 68x1,5 | 50 | 40 | 1,3 | HK DSF 63 25 |
| HK F 6336 | 63 | 73 | 36 | M 68x1,5 | 50 | 40 | 1,2 | HK DSF 63 36 |
| HK F 63 45 | 63 | 73 | 45 | M 68x1,5 | 50 | 40 | 1,3 | HK DSF 63 45 |
| HK F 125 80 | 125 | 145 | 80 | M 130x2 | 92 | 80 | 5,0 | HK DSF 125 80 |
| HK F 140 100 | 140 | 160 | 100 | M 145x2 | 92 | 80 | 4,0 | HK DSF 140 100 |
| HK F 150 100 | 150 | 170 | 100 | M 155x2 | 102 | 90 | 4,5 | HK DSF 150 100 |

Zubehör

HK DSF Dichtsatz für Hydraulikzylinder DSF