


OR 70° Shore EPDM

O-Ring, 70SH EPDM schwefelvernetzt

HANSA FLEX

Eigenschaften

Bauart	O-Ring
Temp. min.	-30 °C
Temp. max.	120 °C
Medien	HFC, HFD, Dampf Luft
Werkstoff	EPDM schwefelvernetzt 70 Shore

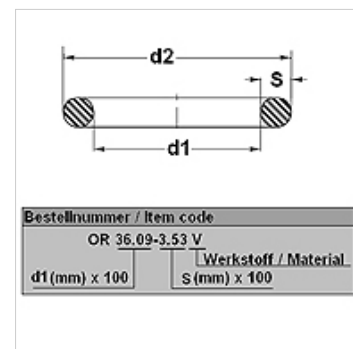

Artikel

Bezeichnung	d1 (mm)	d2 (mm)	s (mm)
OR 7-3 E 70S	7,00	13,00	3,00
OR 12-2 E 70S	12,00	16,00	2,00
OR 15-2 E 70S	15,00	19,00	2,00
OR 20-2 E 70S	20,00	24,00	2,00