

K-GAM IG 3

Gerade Aufschraubverschraubungen, Innengewinde



HANSA FLEX

Eigenschaften

Arbeitsdruck max. 18 bar

Dichtmaterial Buna-N

Werkstoff Messing vernickelt

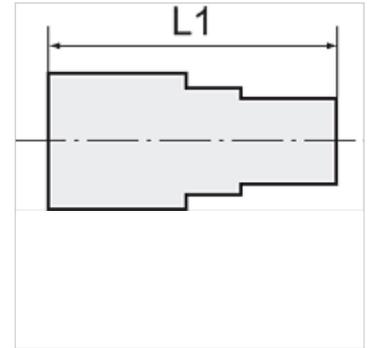

Hinweis

Weitere Angaben auf Anfrage.

Artikel

Bezeichnung	Gewinde	für Schlauch	L1 (mm)	SW
K- 07 40 31 01	G 1/8	6 mm / 4 mm	26,5	14 mm
K- 07 40 31 02	G 1/8	8 mm / 6 mm	26,5	14 mm
K- 07 40 30 99	G 1/4	6 mm / 4 mm	29,5	17 mm
K- 07 40 31 00	G 1/4	8 mm / 6 mm	29,0	17 mm
K- 07 40 30 98	G 1/4	10 mm / 8 mm	31,0	17 mm
K- 07 40 31 05	G 3/8	6 mm / 4 mm	29,5	20 mm
K- 07 40 31 06	G 3/8	8 mm / 6 mm	33,0	20 mm
K- 07 40 31 03	G 3/8	10 mm / 8 mm	35,0	20 mm
K- 07 40 31 04	G 3/8	12 mm / 10 mm	32,5	20 mm
K- 07 40 30 97	G 1/2	8 mm / 6 mm	33,0	24 mm
K- 07 40 30 96	G 1/2	10 mm / 8 mm	38,0	24 mm