

K-W90 GAM 2

Winkel-Aufschraubverschraubungen


HANSA FLEX

Eigenschaften

Arbeitsdruck max. 18 bar

Dichtmaterial Buna-N

Werkstoff Messing vernickelt

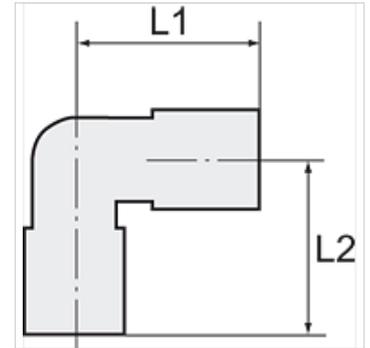

Hinweis

Weitere Angaben auf Anfrage.

Artikel

| Bezeichnung | Gewinde | für Schlauch | L1 (mm) | L2 (mm) | SW |
|----------------|---------|---------------|------------|------------|-------|
| K- 07 40 31 71 | G 1/8 | 5 mm / 3 mm | 21,5 | 19,0 | 10 mm |
| K- 07 40 31 72 | G 1/8 | 6 mm / 4 mm | 22,5 | 19,0 | 10 mm |
| K- 07 40 31 73 | G 1/8 | 8 mm / 6 mm | 22,5 | 19,0 | 10 mm |
| K- 07 40 31 69 | G 1/4 | 6 mm / 4 mm | 25,0 | 23,0 | 11 mm |
| K- 07 40 31 70 | G 1/4 | 8 mm / 6 mm | 25,0 | 23,0 | 11 mm |
| K- 07 40 31 68 | G 1/4 | 10 mm / 8 mm | 26,0 | 23,5 | 13 mm |
| K- 07 40 31 74 | G 3/8 | 12 mm / 10 mm | 30,5 | 28,0 | 17 mm |