

K-T-VB MS NI

T-Verbinder



HANSA FLEX

Eigenschaften

Arbeitsdruck max. 18 bar

Dichtmaterial Buna-N

Werkstoff Messing vernickelt

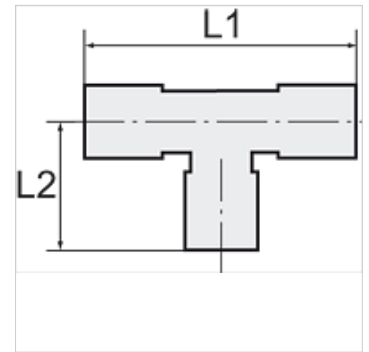

Hinweis

Weitere Angaben auf Anfrage.

Artikel

Bezeichnung	für Schlauch	L1 (mm)	SW
K- 07 40 32 16	4 mm / 2 mm	49,0	9 mm
K- 07 40 32 17	5 mm / 3 mm	43,0	8 mm
K- 07 40 32 18	6 mm / 4 mm	44,0	9 mm
K- 07 40 32 19	8 mm / 6 mm	44,0	10 mm
K- 07 40 32 14	10 mm / 8 mm	50,0	12 mm
K- 07 40 32 15	12 mm / 10 mm	62,0	17 mm