


ELORK

Screw-in fitting, L shaped

Properties

| | |
|---------------------------|--|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | O-ring and spacer diaphragm ring |
| Connection 2 + 3 | metric cylindrical outer thread |
| Sealing form 2 + 3 | 24° inner cone |
| Design | Adjustable direction screw-in fitting |
| Construction | L shaped |
| Scope of supply | Socket with union nut and cutting ring |
| Material | Steel |
| Surface | electro galvanised |

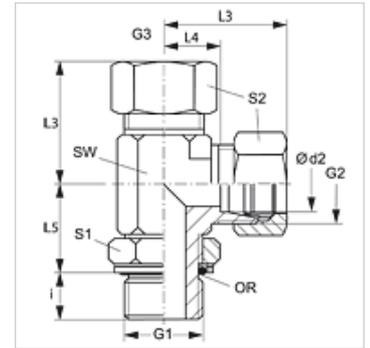

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G1 | G2 + G3 | i (mm) | L3 (mm) | L4 (mm) | L5 (mm) | AF (mm) | S1 | S2 | OR |
|-----------------------|--------|--------------------|--------------|------------|------------|-----------|------------|------------|------------|------------|----|----|--------------|
| ELORK NW 10 HL | L | PN 315 | 12 | G 3/8" -19 | M 18 x 1.5 | 9,0 | 34 | 19 | 28 | 22 | 19 | 22 | 13.94 x 2.62 |

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure - Ø d2 = External pipe diameter

Product versions

XELORK Screw-in fitting, L shaped, Socket (without union nut and cutting ring)