


# LM VA

Screw-in fitting, L shaped

**HANSA FLEX**

## Properties

<b>Connection 1</b>	metric cylindrical outer thread
<b>Sealing form 1</b>	Shape B
<b>Connection 2 + 3</b>	metric cylindrical outer thread
<b>Sealing form 2 + 3</b>	24° inner cone
<b>Design</b>	Screw-in fitting
<b>Construction</b>	L shaped
<b>Standard</b>	DIN 2353 ISO 8434-1
<b>Scope of supply</b>	Socket with union nut and cutting ring
<b>Material</b>	Stainless steel

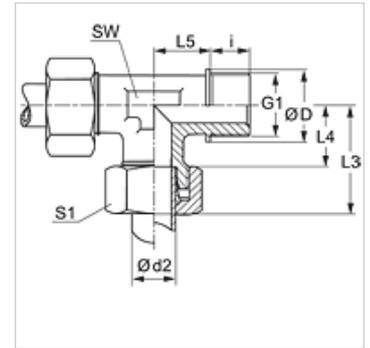

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	Ø D (mm)	i (mm)	L3 (mm)	L4 (mm)	L5 (mm)	AF (mm)	S1
LM NW 20 HL VA	L	PN 160	22	M 26 x 1.5	31	16	27,5	44,0	26	27	36
LM NW 25 HL VA	L	PN 160	28	M 33 x 2	39	18	30,5	47,0	30	36	41
LM NW 32 HL VA	L	PN 160	35	M 42 x 2	49	20	34,5	56,0	34	41	50
LM NW 40 HL VA	L	PN 160	42	M 48 x 2	55	22	40,0	63,0	39	50	60
LM NW 16 HS VA	S	PN 400	20	M 27 x 2	32	16	48,0	26,5	26	27	36
LM NW 20 HS VA	S	PN 400	25	M 33 x 2	39	18	54,0	30,0	30	36	46
LM NW 25 HS VA	S	PN 250	30	M 42 x 2	49	20	62,0	35,5	34	41	50
LM NW 32 HS VA	S	PN 250	38	M 48 x 2	55	22	72,0	41,0	39	50	60

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

## Product versions

LM	Screw-in fitting, L shaped, Steel
XLM VA	Screw-in fitting, L shaped, Stainless steel