


LRK VA

Screw-in fitting, L shaped

Properties

Connection 1	BSPT conical external threads
Sealing form 1	thread seal
Connection 2 + 3	metric cylindrical outer thread
Sealing form 2 + 3	24° inner cone
Design	Screw-in fitting
Construction	L shaped
Standard	DIN 2353 ISO 8434-1
Scope of supply	Socket with union nut and cutting ring
Material	Stainless steel

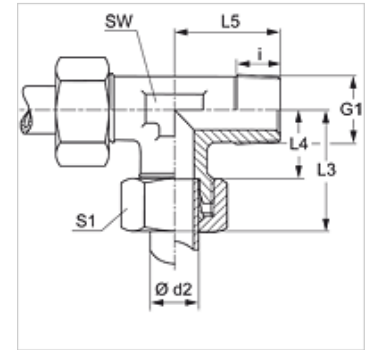

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	i (mm)	L3 (mm)	L4 (mm)	L5 (mm)	AF (mm)	S1
LR 04 LL VA	LL	PN 100	4	R 1/8" K	8	21	11,0	17	9	10
LR 06 LL VA	LL	PN 100	6	R 1/8" K	8	21	9,5	17	9	12
LR 08 LL VA	LL	PN 100	8	R 1/8" K	7	23	11,5	20	12	14
LR NW 04 HL VA	L	PN 315	6	R 1/8" K	8	21	11,0	17	12	14
LR NW 04 HL 1/4 VA	L	PN 315	6	R 1/4" K	12	32	17,5	27	17	22
LR NW 06 HL VA	L	PN 315	8	R 1/4" K	12	29	14,0	26	12	17
LR NW 08 HL VA	L	PN 315	10	R 1/4" K	12	30	15,0	27	14	19
LR NW 08 HL 3/8 VA	L	PN 315	10	R 3/8" K	12	30	15,0	28	17	19
LR NW 10 HL 1/4 VA	L	PN 315	12	R 1/4" K	12	32	17,5	27	17	22
LR NW 10 HL VA	L	PN 315	12	R 3/8" K	12	32	17,0	28	17	22
LR NW 10 HL 1/2 VA	L	PN 315	12	R 1/2" K	14	32	17,0	34	17	22
LR NW 13 HL VA	L	PN 315	15	R 1/2" K	14	36	21,0	34	19	27
LR NW 16 HL VA	L	PN 315	18	R 1/2" K	14	40	23,5	36	24	32
LR NW 03 HS VA	S	PN 400	6	R 1/4" K	12	31	16,0	26	12	17
LR NW 04 HS VA	S	PN 400	8	R 1/4" K	13	32	17,0	27	14	19
LR NW 06 HS VA	S	PN 400	10	R 3/8" K	12	34	17,5	28	17	22
LR NW 08 HS VA	S	PN 400	12	R 3/8" K	12	38	21,5	28	17	24
LR NW 08 HS 1/2 VA	S	PN 400	12	R 1/2" K	14	38	21,5	33	19	24
LR NW 10 HS VA	S	PN 400	14	R 1/2" K	14	40	22,0	32	19	27
LR NW 13 HS VA	S	PN 400	16	R 1/2" K	14	43	24,5	32	24	30

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure - Ø d2 = External pipe diameter

Product versions

LRK	Screw-in fitting, L shaped, Steel
XLRK VA	Screw-in fitting, L shaped, Stainless steel