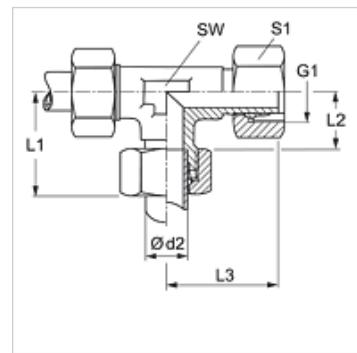


Properties

Connection 1	metric nut thread
Sealing form 1	Pipe socket, pre-assembled
Connection 2 + 3	metric cylindrical outer thread
Sealing form 2 + 3	24° inner cone
Design	Adjustable direction fitting
Construction	L shaped
Standard	DIN 2353 ISO 8434-1
Scope of supply	Socket with union nut and cutting ring
Material	Brass

**Note**

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	L1 (mm)	L2 (mm)	L3 (mm)	AF (mm)	S1
VEL NW 04 HL MG	L	PN 200	6	M 12 x 1.5	27	12,0	26,0	12	14
VEL NW 06 HL MG	L	PN 200	8	M 14 x 1.5	29	14,0	27,0	12	17
VEL NW 08 HL MG	L	PN 200	10	M 16 x 1.5	30	15,0	28,5	14	19
VEL NW 10 HL MG	L	PN 200	12	M 18 x 1.5	32	17,0	29,0	17	22
VEL NW 13 HL MG	L	PN 200	15	M 22 x 1.5	36	21,0	32,0	19	27
VEL NW 16 HL MG	L	PN 200	18	M 26 x 1.5	40	23,5	35,0	24	32

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

VEL	Fitting, L shaped, Steel
VEL VA	Fitting, L shaped, Stainless steel