


VELO

Fitting, L shaped

Properties

Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Connection 2 + 3	metric cylindrical outer thread
Sealing form 2 + 3	24° inner cone
Design	Adjustable direction fitting
Construction	L shaped
Standard	ISO 8434-4
Scope of supply	Socket with union nut and cutting ring
Material	Steel
Surface	electro galvanised

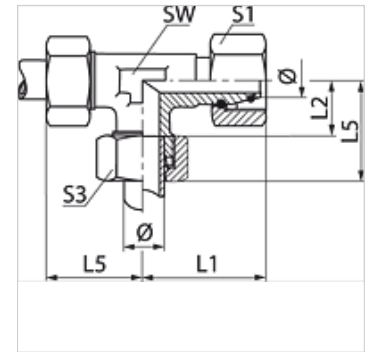

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	L1 (mm)	L2 (mm)	L5 (mm)	AF (mm)	S1	S3	OR
VELO NW 04 HL	L	PN 315	6	26,0	12,0	27	12	14	14	4.0 x 1.5
VELO NW 06 HL	L	PN 315	8	27,5	14,0	29	12	17	17	6.0 x 1.5
VELO NW 08 HL	L	PN 315	10	29,0	15,0	30	14	19	19	7.5 x 1.5
VELO NW 10 HL	L	PN 315	12	29,5	17,0	32	17	22	22	9.0 x 1.5
VELO NW 13 HL	L	PN 315	15	32,5	21,0	36	19	27	27	12.0 x 2.0
VELO NW 16 HL	L	PN 315	18	35,5	23,5	40	24	32	32	15.0 x 2.0
VELO NW 20 HL	L	PN 160	22	38,5	27,5	44	27	36	36	20.0 x 2.0
VELO NW 25 HL	L	PN 160	28	41,5	30,5	47	36	41	41	26.0 x 2.0
VELO NW 32 HL	L	PN 160	35	51,0	34,5	56	41	50	50	32.0 x 2.5
VELO NW 40 HL	L	PN 160	42	56,0	40,0	63	50	60	60	38.0 x 2.5
VELO NW 03 HS	S	PN 630	6	27,0	16,0	31	12	17	17	4.0 x 1.5
VELO NW 04 HS	S	PN 630	8	27,5	17,0	32	14	19	19	6.0 x 1.5
VELO NW 06 HS	S	PN 630	10	30,0	17,5	34	17	22	22	7.5 x 1.5
VELO NW 08 HS	S	PN 630	12	31,0	21,5	38	17	24	24	9.0 x 1.5
VELO NW 10 HS	S	PN 630	14	35,0	22,0	40	19	27	27	10.0 x 2.0
VELO NW 13 HS	S	PN 400	16	36,5	24,5	43	24	30	30	12.0 x 2.0
VELO NW 16 HS	S	PN 400	20	44,5	26,5	48	27	36	36	16.3 x 2.4
VELO NW 20 HS	S	PN 400	25	50,0	30,0	54	36	46	46	20.3 x 2.4
VELO NW 25 HS	S	PN 400	30	55,0	35,5	62	41	50	50	25.3 x 2.4
VELO NW 32 HS	S	PN 315	38	63,0	41,0	72	50	60	60	33.3 x 2.4

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø = External pipe diameter

Product versions

VELO VA	Fitting, L shaped, Stainless steel
XVELO	Fitting, L shaped, Steel