
XELOR
Screw-in fitting, L shaped

Properties

Connection 1	BSP external thread, cylindrical
Sealing form 1	form G
Connection 2 + 3	metric cylindrical outer thread
Sealing form 2 + 3	24° inner cone
Design	Adjustable direction screw-in fitting
Construction	L shaped
Standard	ISO 8434-1
Scope of supply	Socket (without union nut and cutting ring)
Material	Steel
Surface	electro galvanised



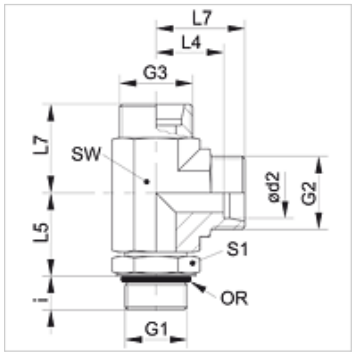

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	G2 + G3	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)	S1	OR
XELOR NW 06 HL	L	PN 315	8	G 1/4" -19	M 14 x 1.5	9,5	16	22,5	23	14	19	10.77 x 2.62
XELOR NW 08 HL	L	PN 315	10	G 1/4" -19	M 16 x 1.5	9,5	17	24,5	24	19	19	10.77 x 2.62
XELOR NW 10 HL	L	PN 250	12	G 3/8" -19	M 18 x 1.5	9,5	19	27,5	26	19	22	13.94 x 2.62
XELOR NW 13 HL	L	PN 250	15	G 1/2" -14	M 22 x 1.5	13,0	21	30,0	28	22	27	17.86 x 2.62
XELOR NW 16 HL	L	PN 250	18	G 1/2" -14	M 26 x 1.5	13,0	24	36,5	31	27	27	17.86 x 2.62
XELOR NW 20 HL	L	PN 160	22	G 3/4" -14	M 30 x 2	13,0	28	37,5	35	30	36	23.47 x 2.62
XELOR NW 25 HL	L	PN 160	28	G 1" -11	M 36 x 2	16,0	31	41,0	38	36	41	29.74 x 3.53
XELOR NW 32 HL	L	PN 160	35	G 1.1/4" -11	M 45 x 2	16,0	38	49,0	48	50	50	37.69 x 3.53
XELOR NW 40 HL	L	PN 160	42	G 1.1/2" -11	M 52 x 2	16,0	38	51,0	49	50	55	44.04 x 3.53
XELOR NW 32 HS	S	PN 160	38	G 1.1/2" -11	M 52 x 2	16,0	34	53,0	50	50	55	44.04 x 3.53

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.