


## Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	form G
<b>Connection 2 + 3</b>	metric cylindrical outer thread
<b>Sealing form 2 + 3</b>	24° inner cone
<b>Design</b>	Adjustable direction screw-in fitting
<b>Construction</b>	L shaped
<b>Standard</b>	ISO 8434-1
<b>Scope of supply</b>	Socket (without union nut and cutting ring)
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

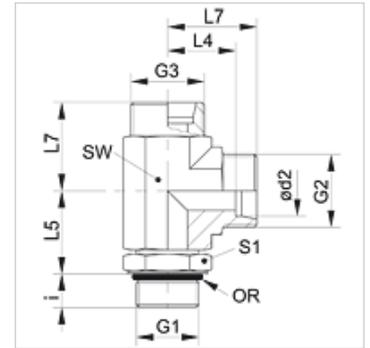

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	G2 + G3	i (mm)	L4 (mm)	L5 (mm)	L7 (mm)	AF (mm)	S1	OR
XELOR NW 06 HL	L	PN 315	8	G 1/4" -19	M 14 x 1.5	9,5	16	22,5	23	14	19	10.77 x 2.62
XELOR NW 08 HL	L	PN 315	10	G 1/4" -19	M 16 x 1.5	9,5	17	24,5	24	19	19	10.77 x 2.62
XELOR NW 10 HL	L	PN 250	12	G 3/8" -19	M 18 x 1.5	9,5	19	27,5	26	19	22	13.94 x 2.62
XELOR NW 13 HL	L	PN 250	15	G 1/2" -14	M 22 x 1.5	13,0	21	30,0	28	22	27	17.86 x 2.62
XELOR NW 16 HL	L	PN 250	18	G 1/2" -14	M 26 x 1.5	13,0	24	36,5	31	27	27	17.86 x 2.62
XELOR NW 20 HL	L	PN 160	22	G 3/4" -14	M 30 x 2	13,0	28	37,5	35	30	36	23.47 x 2.62
XELOR NW 25 HL	L	PN 160	28	G 1" -11	M 36 x 2	16,0	31	41,0	38	36	41	29.74 x 3.53
XELOR NW 32 HL	L	PN 160	35	G 1.1/4" -11	M 45 x 2	16,0	38	49,0	48	50	50	37.69 x 3.53
XELOR NW 40 HL	L	PN 160	42	G 1.1/2" -11	M 52 x 2	16,0	38	51,0	49	50	55	44.04 x 3.53
XELOR NW 32 HS	S	PN 160	38	G 1.1/2" -11	M 52 x 2	16,0	34	53,0	50	50	55	44.04 x 3.53

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter