


Properties

Connection 1	BSP external thread, cylindrical
Sealing form 1	O-ring and spacer diaphragm ring
Connection 2 + 3	metric cylindrical outer thread
Sealing form 2 + 3	24° inner cone
Design	Adjustable direction screw-in fitting
Construction	L shaped
Standard	ISO 8434-1
Scope of supply	Socket (without union nut and cutting ring)
Material	Steel
Surface	electro galvanised

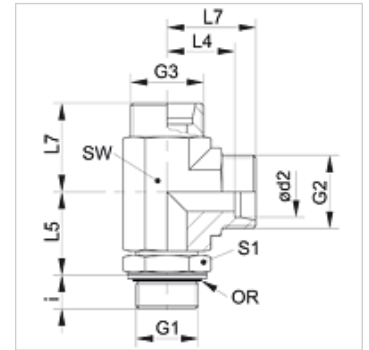

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2	G1	G2 + G3	i	L4	L5	L7	AF	S1	S2	OR
			(mm)			(mm)	(mm)	(mm)	(mm)	(mm)			
XELORK NW 04 HL	L	PN 315	6	G 1/8" -28	M 12 x 1.5	7	14	19	21	14	14	14	8.00 x 1.50
XELORK NW 06 HL	L	PN 315	8	G 1/4" -19	M 14 x 1.5	9	16	23	23	14	19	17	10.77 x 2.62
XELORK NW 08 HL	L	PN 315	10	G 1/4" -19	M 16 x 1.5	9	17	25	24	19	19	19	10.77 x 2.62
XELORK NW 10 HL	L	PN 250	12	G 3/8" -19	M 18 x 1.5	9	19	28	26	19	22	22	13.94 x 2.62
XELORK NW 13 HL	L	PN 250	15	G 1/2" -14	M 22 x 1.5	13	21	30	28	22	27	27	17.86 x 2.62
XELORK NW 16 HL	L	PN 250	18	G 1/2" -14	M 26 x 1.5	13	24	36	31	27	27	32	17.86 x 2.62
XELORK NW 20 HL	L	PN 160	22	G 3/4" -14	M 30 x 2	13	28	36	35	30	36	36	23.47 x 2.62
XELORK NW 25 HL	L	PN 160	28	G 1" -11	M 36 x 2	15	31	44	38	36	41	41	29.74 x 3.53
XELORK NW 32 HL	L	PN 160	35	G 1.1/4" -11	M 45 x 2	15	38	50	48	50	50	50	37.69 x 3.53
XELORK NW 40 HL	L	PN 160	42	G 1.1/2" -11	M 52 x 2	15	38	52	49	50	55	60	44.04 x 3.53
XELORK NW 03 HS	S	PN 315	6	G 1/4" -19	M 14 x 1.5	9	15	23	22	14	19	17	10.77 x 2.62
XELORK NW 04 HS	S	PN 315	8	G 1/4" -19	M 16 x 1.5	9	17	27	24	19	19	19	10.77 x 2.62
XELORK NW 06 HS	S	PN 250	10	G 3/8" -19	M 18 x 1.5	9	18	29	25	19	22	22	13.94 x 2.62
XELORK NW 08 HS	S	PN 250	12	G 3/8" -19	M 20 x 1.5	9	22	29	29	22	22	24	13.94 x 2.62
XELORK NW 10 HS	S	PN 250	14	G 1/2" -14	M 22 x 1.5	13	25	36	33	27	27	27	17.86 x 2.62
XELORK NW 13 HS	S	PN 250	16	G 1/2" -14	M 24 x 1.5	13	25	36	33	27	27	30	17.86 x 2.62
XELORK NW 16 HS	S	PN 250	20	G 3/4" -14	M 30 x 2	12	28	39	38	30	36	36	23.47 x 2.62
XELORK NW 20 HS	S	PN 250	25	G 1" -11	M 36 x 2	14	30	44	42	36	41	46	29.74 x 3.53
XELORK NW 25 HS	S	PN 160	30	G 1.1/4" -11	M 42 x 2	15	36	49	51	50	50	50	37.69 x 3.53
XELORK NW 32 HS	S	PN 160	38	G 1.1/2" -11	M 52 x 2	15	34	55	50	50	55	60	44.04 x 3.53

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure - Ø d2 = External pipe diameter

Product versions

ELORK Screw-in fitting, L shaped, Socket with union nut and cutting ring