


# XLR VA

## Screw-in fitting, L shaped

### Properties

|                           |   |
|---------------------------|---|
| <b>Connection 1</b>       | BSP external thread, cylindrical            |
| <b>Sealing form 1</b>     | Shape B                                     |
| <b>Connection 2 + 3</b>   | metric cylindrical outer thread             |
| <b>Sealing form 2 + 3</b> | 24° inner cone                              |
| <b>Design</b>             | Screw-in fitting                            |
| <b>Construction</b>       | L shaped                                    |
| <b>Standard</b>           | DIN 2353                                    |
| <b>Scope of supply</b>    | Socket (without union nut and cutting ring) |
| <b>Material</b>           | Stainless steel                             |

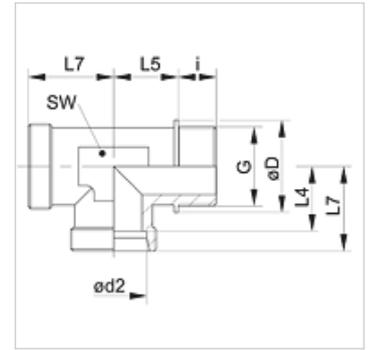

### Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

### Item

| Identification  | Series | Operating pressure | Ø d2<br>(mm) | G            | Ø D<br>(mm) | i<br>(mm) | L4<br>(mm) | L5<br>(mm) | L7<br>(mm) | AF<br>(mm) |
|-----------------|--------|--------------------|--------------|--------------|-------------|-----------|------------|------------|------------|------------|
| XLR NW 20 HL VA | L      | PN 160             | 22           | G 3/4" -14   | 32,0        | 16        | 27,5       | 26         | 35         | 27         |
| XLR NW 25 HL VA | L      | PN 160             | 28           | G 1" -11     | 39,0        | 18        | 30,5       | 30         | 38         | 36         |
| XLR NW 32 HL VA | L      | PN 160             | 35           | G 1.1/4" -11 | 49,0        | 20        | 34,5       | 34         | 45         | 41         |
| XLR NW 40 HL VA | L      | PN 160             | 42           | G 1.1/2" -11 | 55,0        | 22        | 40,0       | 39         | 51         | 50         |
| XLR NW 16 HS VA | S      | PN 400             | 20           | G 3/4" -14   | 32,0        | 16        | 26,5       | 26         | 37         | 27         |
| XLR NW 20 HS VA | S      | PN 400             | 25           | G 1" -11     | 39,0        | 18        | 30,0       | 30         | 42         | 36         |
| XLR NW 25 HS VA | S      | PN 250             | 30           | G 1.1/4" -11 | 49,0        | 20        | 35,5       | 34         | 49         | 41         |
| XLR NW 32 HS VA | S      | PN 250             | 38           | G 1.1/2" -11 | 55,0        | 22        | 41,0       | 39         | 57         | 50         |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

### Product versions

|              |   |
|--------------|---|
| <b>XLR</b>   | Screw-in fitting, L shaped, Steel           |
| <b>LR VA</b> | Screw-in fitting, L shaped, Stainless steel |