


XLRK VA

Screw-in fitting, L shaped

Properties

| | |
|---------------------------|---|
| Connection 1 | BSPT conical external threads |
| Sealing form 1 | thread seal |
| Connection 2 + 3 | metric cylindrical outer thread |
| Sealing form 2 + 3 | 24° inner cone |
| Design | Screw-in fitting |
| Construction | L shaped |
| Standard | DIN 2353 |
| Scope of supply | Socket (without union nut and cutting ring) |
| Material | Stainless steel |

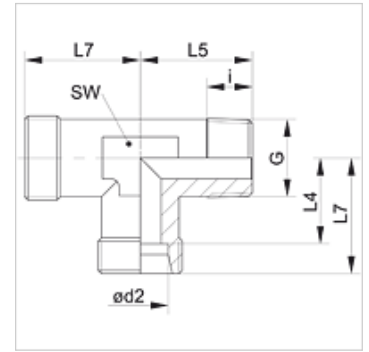

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G | i (mm) | L4 (mm) | L5 (mm) | L7 (mm) | AF (mm) |
|---------------------|--------|--------------------|--------------|----------|-----------|------------|------------|------------|------------|
| XLR 04 LL VA | LL | PN 100 | 4 | R 1/8" K | 8 | 11,0 | 17 | 15 | 9 |
| XLR 06 LL VA | LL | PN 100 | 6 | R 1/8" K | 8 | 9,5 | 17 | 15 | 9 |
| XLR 08 LL VA | LL | PN 100 | 8 | R 1/8" K | 8 | 11,5 | 20 | 17 | 12 |
| XLR NW 04 HL VA | L | PN 315 | 6 | R 1/8" K | 8 | 12,0 | 20 | 19 | 12 |
| XLR NW 04 HL 1/4 VA | L | PN 315 | 6 | R 1/4" K | 12 | 12,0 | 26 | 19 | 12 |
| XLR NW 06 HL VA | L | PN 315 | 8 | R 1/4" K | 12 | 14,0 | 26 | 21 | 12 |
| XLR NW 08 HL VA | L | PN 315 | 10 | R 1/4" K | 12 | 15,0 | 27 | 22 | 14 |
| XLR NW 08 HL 3/8 VA | L | PN 315 | 10 | R 3/8" K | 12 | 15,0 | 28 | 22 | 17 |
| XLR NW 10 HL 1/4 VA | L | PN 315 | 12 | R 1/4" K | 12 | 17,5 | 27 | 24 | 17 |
| XLR NW 10 HL VA | L | PN 315 | 12 | R 3/8" K | 12 | 17,5 | 28 | 24 | 17 |
| XLR NW 10 HL 1/2 VA | L | PN 315 | 12 | R 1/2" K | 14 | 17,5 | 28 | 24 | 17 |
| XLR NW 13 HL VA | L | PN 315 | 15 | R 1/2" K | 14 | 21,0 | 34 | 26 | 19 |
| XLR NW 16 HL VA | L | PN 315 | 18 | R 1/2" K | 14 | 23,5 | 36 | 31 | 24 |
| XLR NW 03 HS VA | S | PN 400 | 6 | R 1/4" K | 12 | 16,0 | 26 | 23 | 14 |
| XLR NW 04 HS VA | S | PN 400 | 8 | R 1/4" K | 12 | 17,0 | 27 | 24 | 17 |
| XLR NW 06 HS VA | S | PN 400 | 10 | R 3/8" K | 12 | 17,5 | 28 | 25 | 17 |
| XLR NW 08 HS VA | S | PN 400 | 12 | R 3/8" K | 12 | 21,5 | 28 | 29 | 19 |
| XLR NW 08 HS 1/2 VA | S | PN 400 | 12 | R 1/2" K | 14 | 21,5 | 33 | 29 | 19 |
| XLR NW 10 HS VA | S | PN 400 | 14 | R 1/2" K | 14 | 22,0 | 32 | 30 | 19 |
| XLR NW 13 HS VA | S | PN 400 | 16 | R 1/2" K | 14 | 24,5 | 32 | 33 | 24 |

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure - Ø d2 = External pipe diameter

Product versions

| | |
|---------------|---|
| XLRK | Screw-in fitting, L shaped, Steel |
| LRK VA | Screw-in fitting, L shaped, Stainless steel |