


XNEL VA

Fitting, L shaped

Properties

| | |
|---------------------------|---|
| Connection 1 | Pipe socket not pre-assembled |
| Sealing form 1 | Cutting ring connection |
| Connection 2 + 3 | metric cylindrical outer thread |
| Sealing form 2 + 3 | 24° inner cone |
| Design | Adjustable direction fitting |
| Construction | L shaped |
| Scope of supply | Socket (without union nut and cutting ring) |
| Material | Stainless steel |

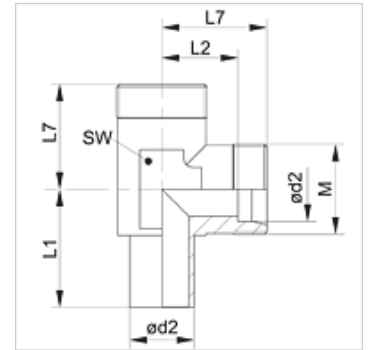

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G1 | L1 (mm) | L2 (mm) | L7 (mm) | AF (mm) |
|------------------|--------|--------------------|-----------|------------|---------|---------|---------|---------|
| XNEL NW 04 HL VA | L | PN 315 | 6 | M 12 x 1.5 | 26,0 | 12,0 | 19 | 12 |
| XNEL NW 06 HL VA | L | PN 315 | 8 | M 14 x 1.5 | 27,5 | 14,0 | 21 | 12 |
| XNEL NW 08 HL VA | L | PN 315 | 10 | M 16 x 1.5 | 29,0 | 15,0 | 22 | 14 |
| XNEL NW 10 HL VA | L | PN 315 | 12 | M 18 x 1.5 | 29,5 | 17,0 | 24 | 17 |
| XNEL NW 13 HL VA | L | PN 315 | 15 | M 22 x 1.5 | 32,5 | 21,0 | 28 | 19 |
| XNEL NW 16 HL VA | L | PN 315 | 18 | M 26 x 1.5 | 35,5 | 23,5 | 31 | 24 |
| XNEL NW 20 HL VA | L | PN 160 | 22 | M 30 x 2 | 38,5 | 27,5 | 35 | 27 |
| XNEL NW 25 HL VA | L | PN 160 | 28 | M 36 x 2 | 41,5 | 30,5 | 38 | 36 |
| XNEL NW 32 HL VA | L | PN 160 | 35 | M 45 x 2 | 51,0 | 34,5 | 45 | 41 |
| XNEL NW 40 HL VA | L | PN 160 | 42 | M 52 x 2 | 56,0 | 40,0 | 51 | 50 |
| <hr/> | | | | | | | | |
| XNEL NW 03 HS VA | S | PN 630 | 6 | M 14 x 1.5 | 29,0 | 16,0 | 23 | 12 |
| XNEL NW 04 HS VA | S | PN 630 | 8 | M 16 x 1.5 | 27,5 | 17,0 | 24 | 14 |
| XNEL NW 06 HS VA | S | PN 630 | 10 | M 18 x 1.5 | 30,0 | 17,5 | 25 | 17 |
| XNEL NW 08 HS VA | S | PN 630 | 12 | M 20 x 1.5 | 31,0 | 21,5 | 29 | 17 |
| XNEL NW 10 HS VA | S | PN 630 | 14 | M 22 x 1.5 | 35,0 | 22,0 | 30 | 19 |
| XNEL NW 13 HS VA | S | PN 400 | 16 | M 24 x 1.5 | 36,5 | 24,5 | 33 | 24 |
| XNEL NW 16 HS VA | S | PN 400 | 20 | M 30 x 2 | 44,5 | 26,5 | 37 | 27 |
| XNEL NW 20 HS VA | S | PN 400 | 25 | M 36 x 2 | 50,0 | 30,0 | 42 | 36 |
| XNEL NW 25 HS VA | S | PN 400 | 30 | M 42 x 2 | 55,0 | 35,5 | 49 | 41 |
| XNEL NW 32 HS VA | S | PN 315 | 38 | M 52 x 2 | 63,0 | 41,0 | 57 | 50 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

| | |
|---------------|------------------------------------|
| XNEL | Fitting, L shaped, Steel |
| NEL VA | Fitting, L shaped, Stainless steel |

Additional elements

| | |
|------------|----------------------|
| VOM | Pre-assembly sockets |
|------------|----------------------|