

# DG HB IR

Rotary fitting, ball bearing

**HANSA FLEX**

## Properties

**Connection 1** BSP external thread, cylindrical

**Sealing form 1** 60° inner cone + shape E

**Connection 2** BSP cylindrical internal threads

**Sealing form 2** Shape A

**Design** Rotary fitting

**Construction type** Ball guided

**Construction** straight


**Temp. min.** -30 °C

**Temp. max.** 95 °C

**Media** Oil

**Material** Steel

**Surface** electro galvanised

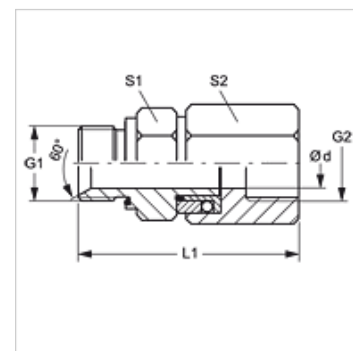

## Note

For technical reasons, a minimum working pressure of 10 bar is required.

Item						
Identification	Operating pressure	Ø d (mm)	G1 + G2	L1 (mm)	S1	S2
DG HB 10 IR	PN 300	8	G 3/8" -19	89,5	24	24
DG HB 13 IR	PN 300	10	G 1/2" -14	89,5	27	32