


Properties

| | |
|--------------------|--|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Edge sealing ring |
| Connection 2 + 3 | metric cylindrical outer thread |
| Sealing form 2 + 3 | 24° inner cone |
| Design | Banjo coupling, throttle free |
| Construction | T shaped |
| Standard | DIN 3865 |
| Scope of supply | Socket with union nut and cutting ring |
| Material | Stainless steel |

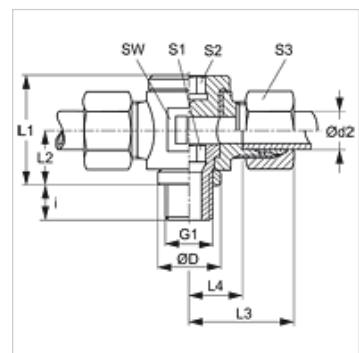

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G1 | Ø D (mm) | i (mm) | L1 (mm) | L2 (mm) | L3 (mm) | L4 (mm) | AF (mm) | S1 | S2 | S3 |
|-----------------|--------|--------------------|--------------|------------|-------------|-----------|------------|------------|------------|------------|------------|----|----|----|
| DTR NW 06 HL VA | L | PN 160 | 8 | G 1/4" -19 | 18 | 12 | 30 | 15 | 29 | 14,0 | 22 | 8 | 8 | 17 |
| DTR NW 13 HL VA | L | PN 100 | 15 | G 1/2" -14 | 26 | 14 | 40 | 20 | 35 | 20,0 | 30 | 12 | 12 | 27 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

| | |
|---------|---|
| DTR VA | Banjo fitting, throttle free, T shaped, Stainless steel |
| XDTR VA | Banjo fitting, throttle free, T shaped, Stainless steel |