


# NAH VA

Reducing fitting, not pre-assembled

**HANSA FLEX**

## Properties

<b>Connection 1</b>	Pipe socket not pre-assembled
<b>Sealing form 1</b>	Cutting ring connection
<b>Connection 2</b>	metric cylindrical outer thread
<b>Sealing form 2</b>	24° inner cone
<b>Design</b>	Reducing fitting, not pre-assembled
<b>Construction</b>	straight
<b>Scope of supply</b>	Pipe socket without union nut and cutting ring
<b>Material</b>	Stainless steel

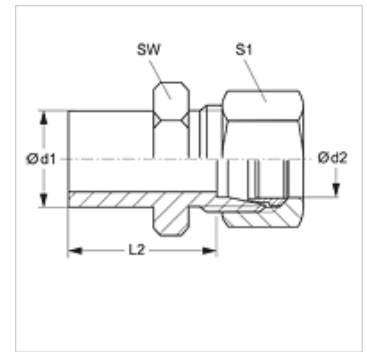

Item	Identification	Series	Operating pressure	Ø d1 (mm)	Ø d2 (mm)	L2 (mm)	AF (mm)	S1
NAH NW 06 L 04 VA	L	PN 315	8	6	29,5	14	14	
NAH NW 08 L 04 VA	L	PN 315	10	6	29,5	14	14	
NAH NW 08 L 06 VA	L	PN 315	10	8	29,5	17	17	
NAH NW 10 L 04 VA	L	PN 315	12	6	29,5	14	14	
NAH NW 10 L 06 VA	L	PN 315	12	8	29,5	17	17	
NAH NW 10 L 08 VA	L	PN 315	12	10	31,0	17	19	
NAH NW 13 L 04 VA	L	PN 315	15	6	29,5	17	14	
NAH NW 13 L 06 VA	L	PN 315	15	8	29,5	17	17	
NAH NW 13 L 08 VA	L	PN 315	15	10	31,0	17	19	
NAH NW 13 L 10 VA	L	PN 315	15	12	31,0	19	22	
NAH NW 16 L 04 VA	L	PN 315	18	6	30,5	19	14	
NAH NW 16 L 06 VA	L	PN 315	18	8	30,5	19	17	
NAH NW 16 L 08 VA	L	PN 315	18	10	30,5	19	19	
NAH NW 16 L 10 VA	L	PN 315	18	12	32,0	19	22	
NAH NW 16 L 13 VA	L	PN 315	18	15	32,5	24	27	
NAH NW 20 L 04 VA	L	PN 160	22	6	33,5	24	14	
NAH NW 20 L 06 VA	L	PN 160	22	8	33,5	24	17	
NAH NW 20 L 08 VA	L	PN 160	22	10	35,0	24	19	
NAH NW 20 L 10 VA	L	PN 160	22	12	35,0	24	22	
NAH NW 20 L 13 VA	L	PN 160	22	15	36,5	24	27	
NAH NW 20 L 16 VA	L	PN 160	22	18	35,0	27	32	
NAH NW 25 L 04 VA	L	PN 160	28	6	34,5	32	14	
NAH NW 25 L 06 VA	L	PN 160	28	8	34,5	32	17	
NAH NW 25 L 08 VA	L	PN 160	28	10	36,0	32	19	
NAH NW 25 L 10 VA	L	PN 160	28	12	36,0	32	22	
NAH NW 25 L 13 VA	L	PN 160	28	15	36,5	32	27	
NAH NW 25 L 16 VA	L	PN 160	28	18	36,0	32	32	
NAH NW 25 L 20 VA	L	PN 160	28	22	36,0	32	36	
NAH NW 32 L 04 VA	L	PN 160	35	6	40,5	36	14	
NAH NW 32 L 06 VA	L	PN 160	35	8	40,5	36	17	
NAH NW 32 L 08 VA	L	PN 160	35	10	42,0	36	19	
NAH NW 32 L 10 VA	L	PN 160	35	12	42,0	36	22	
NAH NW 32 L 13 VA	L	PN 160	35	15	42,0	36	27	
NAH NW 32 L 16 VA	L	PN 160	35	18	42,0	36	32	
NAH NW 32 L 20 VA	L	PN 160	35	22	44,0	36	36	
NAH NW 32 L 25 VA	L	PN 160	35	28	44,0	41	41	
NAH NW 40 L 04 VA	L	PN 160	42	6	42,5	46	14	
NAH NW 40 L 06 VA	L	PN 160	42	8	42,5	46	17	
NAH NW 40 L 08 VA	L	PN 160	42	10	44,0	46	19	
NAH NW 40 L 10 VA	L	PN 160	42	12	43,0	46	22	
NAH NW 40 L 13 VA	L	PN 160	42	15	44,5	46	27	
NAH NW 40 L 16 VA	L	PN 160	42	18	44,0	46	32	
NAH NW 40 L 20 VA	L	PN 160	42	22	46,0	46	36	
NAH NW 40 L 25 VA	L	PN 160	42	28	46,0	46	41	
NAH NW 40 L 32 VA	L	PN 160	42	35	45,0	46	50	
NAH NW 04 S 03 VA	S	PN 630	8	6	31,0	17	17	
NAH NW 06 S 03 VA	S	PN 630	10	6	32,0	17	17	
NAH NW 06 S 04 VA	S	PN 630	10	8	32,0	17	19	
NAH NW 08 S 03 VA	S	PN 630	12	6	33,0	17	17	



Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.

30.06.2026

HANSA-FLEX AG

www.hansa-flex.com

1

Item	Series	Operating pressure	Ø d1 (mm)	Ø d2 (mm)	L2 (mm)	AF (mm)	S1
NAH NW 08 S 04 VA	S	PN 630	12	8	33,0	17	19
NAH NW 08 S 06 VA	S	PN 630	12	10	32,5	19	22
NAH NW 10 S 03 VA	S	PN 630	14	6	37,0	17	17
NAH NW 10 S 04 VA	S	PN 630	14	8	37,0	17	19
NAH NW 10 S 06 VA	S	PN 630	14	10	36,5	19	22
NAH NW 10 S 08 VA	S	PN 630	14	12	36,5	22	24
NAH NW 13 S 03 VA	S	PN 630	16	6	37,0	17	17
NAH NW 13 S 04 VA	S	PN 630	16	8	37,0	17	19
NAH NW 13 S 06 VA	S	PN 630	16	10	36,5	19	22
NAH NW 13 S 08 VA	S	PN 630	16	12	36,5	22	24
NAH NW 13 S 10 VA	S	PN 630	16	14	38,0	24	27
NAH NW 16 S 03 VA	S	PN 400	20	6	43,0	22	17
NAH NW 16 S 04 VA	S	PN 400	20	8	43,0	22	19
NAH NW 16 S 06 VA	S	PN 400	20	10	42,5	22	22
NAH NW 16 S 08 VA	S	PN 400	20	12	42,5	22	24
NAH NW 16 S 10 VA	S	PN 400	20	14	44,0	24	27
NAH NW 16 S 13 VA	S	PN 400	20	16	43,5	27	30
NAH NW 20 S 03 VA	S	PN 400	25	6	47,0	27	17
NAH NW 20 S 04 VA	S	PN 400	25	8	47,0	27	19
NAH NW 20 S 06 VA	S	PN 400	25	10	46,5	27	22
NAH NW 20 S 08 VA	S	PN 400	25	12	46,5	17	24
NAH NW 20 S 10 VA	S	PN 400	25	14	48,0	27	27
NAH NW 20 S 13 VA	S	PN 400	25	16	47,5	27	30
NAH NW 20 S 16 VA	S	PN 400	25	20	47,5	32	36
NAH NW 25 S 03 VA	S	PN 400	30	6	49,0	32	17
NAH NW 25 S 04 VA	S	PN 400	30	8	49,0	32	19
NAH NW 25 S 06 VA	S	PN 400	30	10	48,5	32	22
NAH NW 25 S 08 VA	S	PN 400	30	12	48,5	32	24
NAH NW 25 S 10 VA	S	PN 400	30	14	50,0	32	27
NAH NW 25 S 13 VA	S	PN 400	30	16	49,5	32	30
NAH NW 25 S 16 VA	S	PN 400	30	20	49,5	32	36
NAH NW 25 S 20 VA	S	PN 400	30	25	50,0	41	46
NAH NW 32 S 03 VA	S	PN 315	38	6	56,0	41	17
NAH NW 32 S 04 VA	S	PN 315	38	8	56,0	41	19
NAH NW 32 S 06 VA	S	PN 315	38	10	55,5	41	22
NAH NW 32 S 08 VA	S	PN 315	38	12	56,5	41	24
NAH NW 32 S 10 VA	S	PN 315	38	14	57,0	41	27
NAH NW 32 S 13 VA	S	PN 315	38	16	56,5	41	30
NAH NW 32 S 16 VA	S	PN 315	38	20	56,5	41	36
NAH NW 32 S 20 VA	S	PN 315	38	25	57,0	41	46
NAH NW 32 S 25 VA	S	PN 315	38	30	57,5	46	50

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d1 = External pipe diameter – Ø d2 = External pipe diameter

## Product versions

NAH	Reducing fitting, not pre-assembled, Steel
XNAH VA	Reducing fitting, not pre-assembled, Stainless steel

## Additional elements

VOM	Pre-assembly sockets
-----	----------------------