


TRK MG

Screw-in fitting, T shaped

HANSA FLEX

Properties

| | |
|---------------------------|--|
| Connection 1 | BSPT conical external threads |
| Sealing form 1 | thread seal |
| Connection 2 + 3 | metric cylindrical outer thread |
| Sealing form 2 + 3 | 24° inner cone |
| Design | Screw-in fitting |
| Construction | T shaped |
| Standard | DIN 2353 ISO 8434-1 |
| Scope of supply | Socket with union nut and cutting ring |
| Material | Brass |

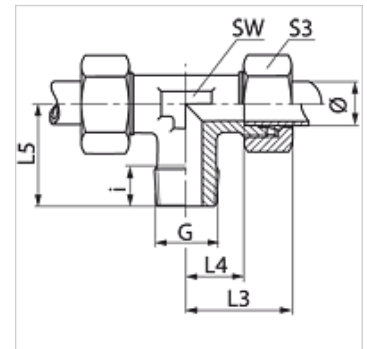

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Series | Operating pressure | External pipe Ø (mm) | G | i (mm) | L3 (mm) | L4 (mm) | L5 (mm) | AF (mm) | S3 |
|----------------|--------|--------------------|-------------------------|----------|-----------|------------|------------|------------|------------|----|
| TR 06 LL MG | LL | PN 63 | 6 | R 1/8" K | 8 | 21 | 9,5 | 17 | 9 | 12 |
| TR NW 04 HL MG | L | PN 200 | 6 | R 1/8" K | 8 | 27 | 12,0 | 20 | 12 | 14 |
| TR NW 06 HL MG | L | PN 200 | 8 | R 1/4" K | 12 | 29 | 14,0 | 26 | 12 | 17 |
| TR NW 08 HL MG | L | PN 200 | 10 | R 1/4" K | 12 | 30 | 15,0 | 27 | 14 | 19 |
| TR NW 10 HL MG | L | PN 200 | 12 | R 3/8" K | 12 | 32 | 17,0 | 28 | 17 | 22 |
| TR NW 13 HL MG | L | PN 200 | 15 | R 1/2" K | 14 | 36 | 21,0 | 34 | 19 | 27 |
| TR NW 03 HS MG | S | PN 250 | 6 | R 1/4" K | 12 | 31 | 16,0 | 26 | 12 | 17 |
| TR NW 06 HS MG | S | PN 250 | 10 | R 3/8" K | 12 | 34 | 17,5 | 28 | 17 | 22 |

Ø = External pipe diameter – Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure

Product versions

| | |
|--------|---|
| TRK | Screw-in fitting, T shaped, Steel |
| TRK VA | Screw-in fitting, T shaped, Stainless steel |