


### Properties

<b>Connection 1</b>	BSP external thread, cylindrical
<b>Sealing form 1</b>	Shape E
<b>Connection 2</b>	Pipe socket not pre-assembled
<b>Sealing form 2</b>	Cutting ring connection
<b>Design</b>	Screw-in sockets
<b>Construction</b>	straight
<b>Standard</b>	DIN 2353 ISO 8434-1
<b>Scope of supply</b>	Socket (without union nut and cutting ring)
<b>Material</b>	Stainless steel

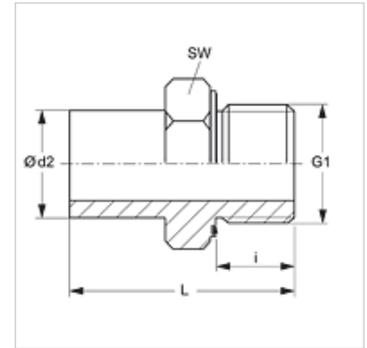

### Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

### Ordering information

Seals of NBR  
FPM (Viton) on request

Item	Identification	Series	Operating pressure	Ø d2 (mm)	G1	i (mm)	L (mm)	AF (mm)
NVR NW 04 L ED VA	L	PN 315	6	G 1/8" -28	8	32,5	14	
NVR NW 04 L 1/4 ED VA	L	PN 315	6	G 1/4" -19	12	38,5	19	
NVR NW 06 L ED VA	L	PN 315	8	G 1/4" -19	12	39,0	19	
NVR NW 08 L ED VA	L	PN 315	10	G 1/4" -19	12	39,5	19	
NVR NW 08 L 3/8 ED VA	L	PN 315	10	G 3/8" -19	12	41,0	22	
NVR NW 08 L 1/2 ED VA	L	PN 315	10	G 1/2" -14	14	43,5	27	
NVR NW 10 L 1/4 ED VA	L	PN 315	12	G 1/4" -19	12	40,5	19	
NVR NW 10 L ED VA	L	PN 315	12	G 3/8" -19	12	42,0	22	
NVR NW 10 L 1/2 ED VA	L	PN 315	12	G 1/2" -14	14	44,5	27	
NVR NW 13 L 3/8 ED VA	L	PN 315	15	G 3/8" -19	12	42,0	22	
NVR NW 13 L ED VA	L	PN 315	15	G 1/2" -14	14	44,5	27	
NVR NW 16 L 3/8 ED VA	L	PN 315	18	G 3/8" -19	12	43,0	22	
NVR NW 16 L ED VA	L	PN 315	18	G 1/2" -14	14	45,5	27	
NVR NW 16 L 3/4 ED VA	L	PN 315	18	G 3/4" -14	16	48,0	32	
NVR NW 20 L 3/8 ED VA	L	PN 160	22	G 3/8" -19	12	43,5	27	
NVR NW 20 L 1/2 ED VA	L	PN 160	22	G 1/2" -14	14	46,0	27	
NVR NW 20 L ED VA	L	PN 160	22	G 3/4" -14	16	48,5	32	
NVR NW 25 L ED VA	L	PN 160	28	G 1" -11	18	53,0	41	
NVR NW 32 L ED VA	L	PN 160	35	G 1.1/4" -11	20	62,5	50	
NVR NW 40 L ED VA	L	PN 160	42	G 1.1/2" -11	22	69,0	55	
NVR NW 03 S 1/8 ED VA	S	PN 630	6	G 1/8" -28	8	34,5	14	
NVR NW 03 S ED VA	S	PN 630	6	G 1/4" -19	12	39,0	19	
NVR NW 04 S ED VA	S	PN 630	8	G 1/4" -19	12	39,0	19	
NVR NW 06 S 1/4 ED VA	S	PN 630	10	G 1/4" -19	12	42,0	19	
NVR NW 06 S ED VA	S	PN 630	10	G 3/8" -19	12	44,0	22	
NVR NW 06 S 1/2 ED VA	S	PN 630	10	G 1/2" -14	14	49,0	27	
NVR NW 08 S 1/4 ED VA	S	PN 630	12	G 1/4" -19	12	42,0	19	
NVR NW 08 S ED VA	S	PN 630	12	G 3/8" -19	12	44,0	22	
NVR NW 08 S 1/2 ED VA	S	PN 630	12	G 1/2" -14	14	49,0	27	
NVR NW 10 S 1/4 ED VA	S	PN 630	14	G 1/4" -19	12	43,5	19	
NVR NW 10 S ED VA	S	PN 630	14	G 1/2" -14	14	50,5	27	
NVR NW 13 S 3/8 ED VA	S	PN 400	16	G 3/8" -19	12	46,0	22	
NVR NW 13 S ED VA	S	PN 400	16	G 1/2" -14	14	51,0	27	
NVR NW 13 S 3/4 ED VA	S	PN 400	16	G 3/4" -14	16	54,5	32	
NVR NW 16 S 1/2 ED VA	S	PN 400	20	G 1/2" -14	14	55,5	27	
NVR NW 16 S ED VA	S	PN 400	20	G 3/4" -14	16	59,0	32	
NVR NW 20 S 3/4 ED VA	S	PN 400	25	G 3/4" -14	16	62,0	32	



Item							
Identification	Series	Operating pressure	Ø d2 (mm)	G1	i (mm)	L (mm)	AF (mm)
NVR NW 20 S ED VA	S	PN 400	25	G 1" -11	18	66,0	41
NVR NW 25 S ED VA	S	PN 400	30	G 1.1/4" -11	20	71,0	50
NVR NW 32 S ED VA	S	PN 315	38	G 1.1/2" -11	22	82,0	55

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

## Product versions

**NVR ED** Screw-in sockets, Steel

## Spare parts

**WD V** Soft seal for ED fittings

## Additional elements

**VOM** Pre-assembly sockets