


# VET MG

Fitting, T shaped

## Properties

|                           |  |
|---------------------------|--|
| <b>Connection 1</b>       | metric nut thread                      |
| <b>Sealing form 1</b>     | Pipe socket with cutting ring          |
| <b>Connection 2 + 3</b>   | metric cylindrical outer thread        |
| <b>Sealing form 2 + 3</b> | 24° inner cone                         |
| <b>Design</b>             | Adjustable direction fitting           |
| <b>Construction</b>       | T shaped                               |
| <b>Standard</b>           | DIN 2353<br>ISO 8434-1                 |
| <b>Scope of supply</b>    | Socket with union nut and cutting ring |
| <b>Material</b>           | Brass                                  |

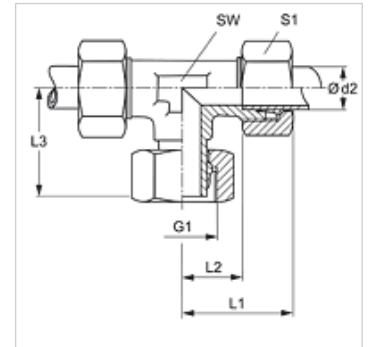

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

| Identification  | Series | Operating pressure | Ø d2<br>(mm) | G1         | L1<br>(mm) | L2<br>(mm) | L3<br>(mm) | AF<br>(mm) | S1 |
|-----------------|--------|--------------------|--------------|------------|------------|------------|------------|------------|----|
| VET NW 04 HL MG | L      | PN 200             | 6            | M 12 x 1.5 | 27         | 12,0       | 26,0       | 12         | 14 |
| VET NW 06 HL MG | L      | PN 200             | 8            | M 14 x 1.5 | 29         | 14,0       | 27,0       | 12         | 17 |
| VET NW 08 HL MG | L      | PN 200             | 10           | M 16 x 1.5 | 30         | 15,0       | 28,5       | 14         | 19 |
| VET NW 10 HL MG | L      | PN 200             | 12           | M 18 x 1.5 | 32         | 17,0       | 29,0       | 17         | 22 |
| VET NW 13 HL MG | L      | PN 200             | 15           | M 22 x 1.5 | 36         | 21,0       | 32,0       | 19         | 27 |
| VET NW 16 HL MG | L      | PN 200             | 18           | M 26 x 1.5 | 40         | 23,5       | 36,0       | 24         | 32 |
| VET NW 04 HS MG | S      | PN 250             | 8            | M 16 x 1.5 | 32         | 17,0       | 27,0       | 14         | 19 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

## Product versions

|        |                                    |
|--------|------------------------------------|
| VET    | Fitting, T shaped, Steel           |
| VET VA | Fitting, T shaped, Stainless steel |