

VET VA
Fitting, T shaped

Properties

Connection 1	metric nut thread
Sealing form 1	Pipe socket with cutting ring
Connection 2 + 3	metric cylindrical outer thread
Sealing form 2 + 3	24° inner cone
Design	Adjustable direction fitting
Construction	T shaped
Standard	DIN 2353 ISO 8434-1
Scope of supply	Socket with union nut and cutting ring
Material	Stainless steel

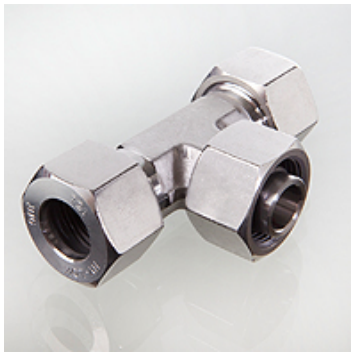

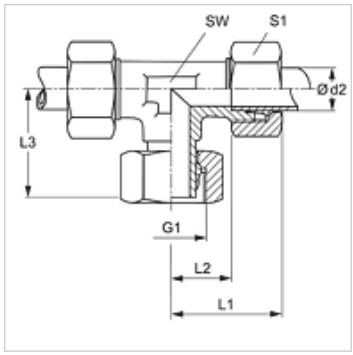

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	L1 (mm)	L2 (mm)	L3 (mm)	AF (mm)	S1
VET NW 04 HL VA	L	PN 315	6	M 12 x 1.5	27	12,0	26,0	12	14
VET NW 06 HL VA	L	PN 315	8	M 14 x 1.5	29	14,0	27,0	12	17
VET NW 08 HL VA	L	PN 315	10	M 16 x 1.5	30	15,0	28,5	14	19
VET NW 10 HL VA	L	PN 315	12	M 18 x 1.5	32	17,0	29,0	17	22
VET NW 13 HL VA	L	PN 315	15	M 22 x 1.5	36	21,0	32,0	19	27
VET NW 16 HL VA	L	PN 315	18	M 26 x 1.5	40	23,5	36,0	24	32
VET NW 20 HL VA	L	PN 160	22	M 30 x 2	44	27,5	38,0	27	36
VET NW 25 HL VA	L	PN 160	28	M 36 x 2	47	30,5	41,5	36	41
VET NW 32 HL VA	L	PN 160	35	M 45 x 2	56	34,5	51,0	41	50
VET NW 40 HL VA	L	PN 160	42	M 52 x 2	63	40,0	56,0	50	60
VET NW 03 HS VA	S	PN 630	6	M 14 x 1.5	31	16,0	27,0	12	17
VET NW 04 HS VA	S	PN 630	8	M 16 x 1.5	32	17,0	27,0	14	19
VET NW 06 HS VA	S	PN 630	10	M 18 x 1.5	34	17,5	29,5	17	22
VET NW 08 HS VA	S	PN 630	12	M 20 x 1.5	38	21,5	30,5	17	24
VET NW 10 HS VA	S	PN 630	14	M 22 x 1.5	40	22,0	34,5	19	27
VET NW 13 HS VA	S	PN 400	16	M 24 x 1.5	43	24,5	36,0	24	30
VET NW 16 HS VA	S	PN 400	20	M 30 x 2	48	26,5	44,0	27	36
VET NW 20 HS VA	S	PN 400	25	M 36 x 2	54	30,0	49,5	36	46
VET NW 25 HS VA	S	PN 400	30	M 42 x 2	62	36,5	55,0	41	50
VET NW 32 HS VA	S	PN 315	38	M 52 x 2	72	41,0	63,0	50	60

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

VET	Fitting, T shaped, Steel
VET MG	Fitting, T shaped, Brass
XVET VA	Fitting, T shaped, Stainless steel

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.