
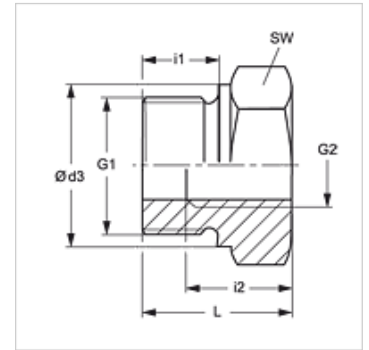


RIK VA

Reducing adapter, short

Properties

| | |
|-----------------------|----------------------------------|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Shape B |
| Connection 2 | BSP cylindrical internal threads |
| Design | Reducing adapters |
| Construction | short |
| Material | Stainless steel |



Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Operating pressure | G1 | G2 | Ø d3 (mm) | i1 (mm) | i2 (mm) | L (mm) | AF (mm) |
|-----------------|--------------------|--------------|--------------|--------------|------------|------------|-----------|------------|
| RIK NW 10 03 VA | PN 400 | G 3/8" -19 | G 1/8" -28 | 22 | 12 | 9 | 22,5 | 22 |
| RIK NW 13 03 VA | PN 400 | G 1/2" -14 | G 1/8" -28 | 26 | 14 | 9 | 24,0 | 27 |
| RIK NW 13 06 VA | PN 315 | G 1/2" -14 | G 1/4" -19 | 26 | 14 | 13 | 24,0 | 27 |
| RIK NW 20 03 VA | PN 315 | G 3/4" -14 | G 1/8" -28 | 32 | 16 | 9 | 26,0 | 32 |
| RIK NW 20 06 VA | PN 315 | G 3/4" -14 | G 1/4" -19 | 32 | 16 | 13 | 26,0 | 32 |
| RIK NW 20 10 VA | PN 315 | G 3/4" -14 | G 3/8" -19 | 32 | 16 | 14 | 26,0 | 32 |
| RIK NW 25 06 VA | PN 315 | G 1" -11 | G 1/4" -19 | 39 | 18 | 14 | 29,0 | 41 |
| RIK NW 25 10 VA | PN 315 | G 1" -11 | G 3/8" -19 | 39 | 18 | 14 | 29,0 | 41 |
| RIK NW 25 13 VA | PN 315 | G 1" -11 | G 1/2" -14 | 39 | 18 | 16 | 29,0 | 41 |
| RIK NW 32 13 VA | PN 160 | G 1.1/4" -11 | G 1/2" -14 | 49 | 20 | 16 | 32,0 | 50 |
| RIK NW 32 20 VA | PN 160 | G 1.1/4" -11 | G 3/4" -14 | 49 | 20 | 18 | 32,0 | 50 |
| RIK NW 40 13 VA | PN 160 | G 1.1/2" -11 | G 1/2" -14 | 55 | 22 | 16 | 36,0 | 55 |
| RIK NW 40 20 VA | PN 160 | G 1.1/2" -11 | G 3/4" -14 | 55 | 22 | 18 | 36,0 | 55 |
| RIK NW 40 25 VA | PN 160 | G 1.1/2" -11 | G 1" -11 | 55 | 22 | 20 | 36,0 | 55 |
| RIK NW 50 20 VA | PN 160 | G 2" -11 | G 3/4" -14 | 68 | 24 | 18 | 44,0 | 70 |
| RIK NW 50 25 VA | PN 160 | G 2" -11 | G 1" -11 | 68 | 24 | 20 | 44,0 | 70 |
| RIK NW 50 32 VA | PN 160 | G 2" -11 | G 1.1/4" -11 | 68 | 24 | 22 | 44,0 | 70 |
| RIK NW 50 40 VA | PN 160 | G 2" -11 | G 1.1/2" -11 | 68 | 24 | 24 | 44,0 | 70 |

PN = Nominal pressure PB = Max. operating pressure

Product versions

| | |
|--------|--------------------------------|
| RIK | Reducing adapter, short, Steel |
| RIK MG | Reducing adapter, short, Brass |