


RIK ED VA

Reducing adapter, short

Properties

| | |
|-----------------------|----------------------------------|
| Connection 1 | BSP external thread, cylindrical |
| Sealing form 1 | Shape E |
| Connection 2 | BSP cylindrical internal threads |
| Design | Reducing adapters |
| Construction | short |
| Material | Stainless steel |

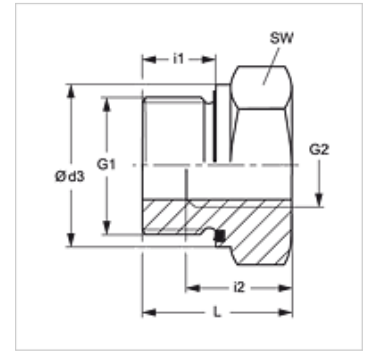

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Ordering information

Seals of NBR
FPM (Viton) on request

Item

| Identification | Operating pressure | G1 | G2 | Ø d3 (mm) | i1 (mm) | i2 (mm) | L (mm) | AF (mm) |
|--------------------|--------------------|--------------|--------------|--------------|------------|------------|-----------|------------|
| RIK NW 10 03 ED VA | PN 400 | G 3/8" -19 | G 1/8" -28 | 21,9 | 12 | 9 | 22,5 | 22 |
| RIK NW 13 03 ED VA | PN 400 | G 1/2" -14 | G 1/8" -28 | 26,9 | 14 | 9 | 24,0 | 27 |
| RIK NW 13 06 ED VA | PN 400 | G 1/2" -14 | G 1/4" -19 | 26,9 | 14 | 14 | 24,0 | 27 |
| RIK NW 20 03 ED VA | PN 315 | G 3/4" -14 | G 1/8" -28 | 31,9 | 16 | 9 | 26,0 | 32 |
| RIK NW 20 06 ED VA | PN 315 | G 3/4" -14 | G 1/4" -19 | 31,9 | 16 | 14 | 26,0 | 32 |
| RIK NW 20 10 ED VA | PN 315 | G 3/4" -14 | G 3/8" -19 | 31,9 | 16 | 14 | 26,0 | 32 |
| RIK NW 25 06 ED VA | PN 315 | G 1" -11 | G 1/4" -19 | 39,9 | 18 | 14 | 29,0 | 41 |
| RIK NW 25 10 ED VA | PN 315 | G 1" -11 | G 3/8" -19 | 39,9 | 18 | 14 | 29,0 | 41 |
| RIK NW 25 13 ED VA | PN 315 | G 1" -11 | G 1/2" -14 | 39,9 | 18 | 16 | 29,0 | 41 |
| RIK NW 32 13 ED VA | PN 315 | G 1.1/4" -11 | G 1/2" -14 | 49,9 | 20 | 16 | 32,0 | 50 |
| RIK NW 32 20 ED VA | PN 315 | G 1.1/4" -11 | G 3/4" -14 | 49,9 | 20 | 18 | 32,0 | 50 |
| RIK NW 40 13 ED VA | PN 250 | G 1.1/2" -11 | G 1/2" -14 | 54,9 | 22 | 16 | 36,0 | 55 |
| RIK NW 40 20 ED VA | PN 250 | G 1.1/2" -11 | G 3/4" -14 | 54,9 | 22 | 18 | 36,0 | 55 |
| RIK NW 40 25 ED VA | PN 250 | G 1.1/2" -11 | G 1" -11 | 54,9 | 22 | 20 | 36,0 | 55 |
| RIK NW 50 40 ED VA | PN 160 | G 2" -11 | G 1.1/2" -11 | 69,9 | 24 | 24 | 40,0 | 70 |

PN = Nominal pressure PB = Max. operating pressure

Product versions

RIK ED Reducing adapter, short, Steel

Spare parts

WD V Soft seal for ED fittings