

# RIK M
Reducing adapter, short

## Properties

| | |
|---|---|
| **Connection 1** | metric cylindrical outer thread |
| **Sealing form 1** | Shape B |
| **Connection 2** | metric cylindrical inner thread |
| **Design** | Reducing adapters |
| **Construction** | short |
| **Material** | Steel |
| **Surface** | electro galvanised |

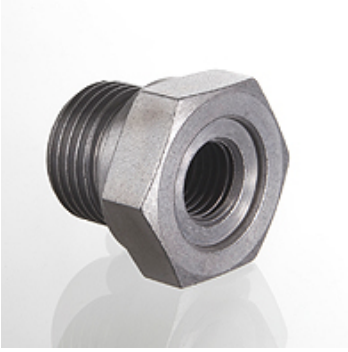




## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

| Identification | Operating pressure | G1 | G2 | Ø d3 (mm) | i1 (mm) | i2 (mm) | L (mm) | AF (mm) |
|---|---|---|---|---|---|---|---|---|
| **RIK M 14 12-1** | PN 400 | M 14 x 1.5 | M 12 x 1 | 19 | 12 | 10 | 20 | 24 |
| **RIK M 16 12** | PN 400 | M 16 x 1.5 | M 12 x 1.5 | 21 | 12 | 10 | 24 | 27 |
| **RIK M 16 12-1** | PN 400 | M 16 x 1.5 | M 12 x 1 | 27 | 12 | 12 | 24 | 27 |
| **RIK M 22 12** | PN 400 | M 22 x 1.5 | M 12 x 1.5 | 27 | 14 | 12 | 24 | 27 |
| **RIK M 22 14** | PN 400 | M 22 x 1.5 | M 14 x 1.5 | 27 | 14 | 12 | 24 | 27 |

PN = Nominal pressure  PB = Max. operating pressure

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*