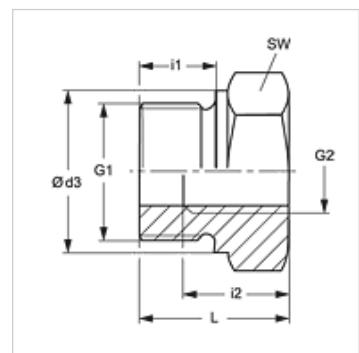



Properties

Connection 1	metric cylindrical outer thread
Sealing form 1	Shape B
Connection 2	metric cylindrical inner thread
Design	Reducing adapters
Construction	short
Material	Steel
Surface	electro galvanised

**Note**

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Operating pressure	G1	G2	Ø d3 (mm)	i1 (mm)	i2 (mm)	L (mm)	AF (mm)
RIK M 14 12-1	PN 400	M 14 x 1.5	M 12 x 1	19	12	10	20	24
RIK M 16 12	PN 400	M 16 x 1.5	M 12 x 1.5	21	12	10	24	27
RIK M 16 12-1	PN 400	M 16 x 1.5	M 12 x 1	27	12	12	24	27
RIK M 22 12	PN 400	M 22 x 1.5	M 12 x 1.5	27	14	12	24	27
RIK M 22 14	PN 400	M 22 x 1.5	M 14 x 1.5	27	14	12	24	27

PN = Nominal pressure PB = Max. operating pressure