


# RIL M

## Reducing adapter, long

### Properties

<b>Connection 1</b>	metric cylindrical outer thread
<b>Sealing form 1</b>	Shape B
<b>Connection 2</b>	metric cylindrical inner thread
<b>Design</b>	Reducing adapters
<b>Construction</b>	Long
<b>Material</b>	Steel
<b>Surface</b>	electro galvanised

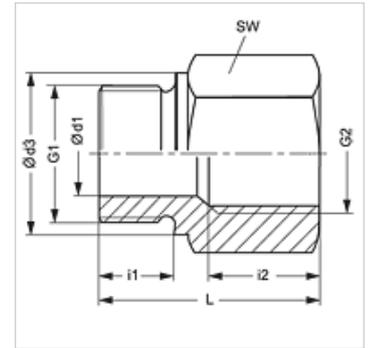

### Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

### Item

Identification	Operating pressure	Ø d1 (mm)	G1	G2	Ø d3 (mm)	i1 (mm)	i2 (mm)	L (mm)	AF (mm)
<b>RIL M 18 22</b>	PN 250	8	M 18 x 1.5	M 22 x 1.5	23	12	20	41	32

PN = Nominal pressure PB = Max. operating pressure