

RIL M
Reducing adapter, long

HANSA-FLEX

Properties

Connection 1	metric cylindrical outer thread
Sealing form 1	Shape B
Connection 2	metric cylindrical inner thread
Design	Reducing adapters
Construction	Long
Material	Steel
Surface	electro galvanised

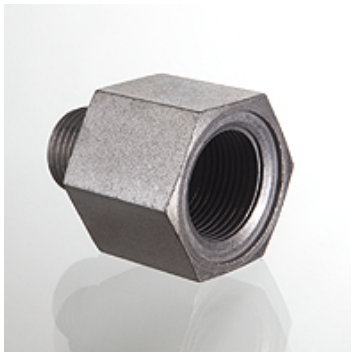

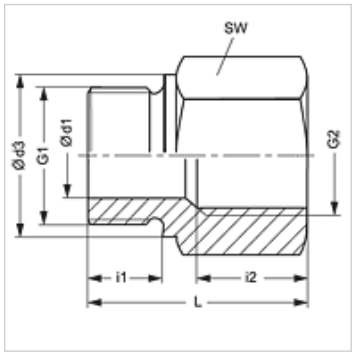

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Operating pressure	Ø d1 (mm)	G1	G2	Ø d3 (mm)	i1 (mm)	i2 (mm)	L (mm)	AF (mm)
RIL M 18 22	PN 250	8	M 18 x 1.5	M 22 x 1.5	23	12	20	41	32

PN = Nominal pressure PB = Max. operating pressure

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.