

SA MG

Welded on fitting

HANSA FLEX

Properties

Connection 1 Welded on socket for metric pipe

Connection 2 metric cylindrical outer thread

Sealing form 2 24° inner cone


Design Welded on fitting

Construction straight

Standard DIN 2353
ISO 8434-1

Scope of supply Socket with union nut and cutting ring

Material Brass

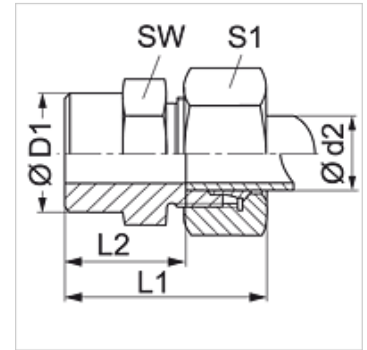

Item

Identification	Series	Operating pressure	Ø d2 (mm)	Ø D1 (mm)	L1 (mm)	L2 (mm)	AF (mm)	S1
SA NW 04 HL MG	L	PN 200	6	10	29	14,0	14	14
SA NW 08 HL MG	L	PN 200	10	14	33	18,0	17	19
SA NW 10 HL MG	L	PN 200	12	16	33	18,0	19	22
SA NW 13 HL MG	L	PN 200	15	19	37	22,0	22	27
SA NW 25 HL MG	L	PN 100	28	32	47	30,5	41	41

Series: LL = Very light L = Light S = Heavy - PN = Nominal pressure PB = Max. operating pressure - Ø d2 = External pipe diameter

Product versions

SA Welded on fitting, Steel

SA VA Welded on fitting, Stainless steel