


### Properties

Connection 1	BSP external thread, cylindrical
Sealing form 1	Shape B
Connection 2 + 3	metric cylindrical outer thread
Sealing form 2 + 3	24° inner cone
Design	Screw-in fitting
Construction	T shaped
Standard	DIN 2353 ISO 8434-1
Scope of supply	Socket (without union nut and cutting ring)
Material	Steel
Surface	electro galvanised

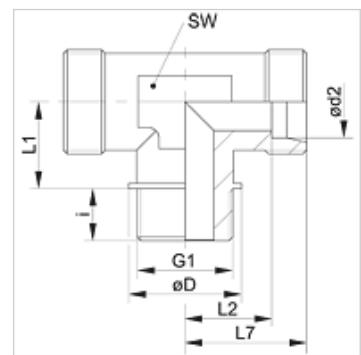

### Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

### Item

Identification	Series	Operating pressure	Ø d2 (mm)	G1	Ø D (mm)	i (mm)	L1 (mm)	L2 (mm)	L7 (mm)	AF (mm)
XTR NW 20 HL	L	PN 160	22	G 3/4" -14	31,0	16	26	27,5	35	27
XTR NW 25 HL	L	PN 160	28	G 1" -11	39,0	18	30	30,5	38	36
XTR NW 32 HL	L	PN 160	35	G 1 1/4" -11	49,0	20	34	34,5	45	41
XTR NW 40 HL	L	PN 160	42	G 1 1/2" -11	55,0	22	39	40,0	51	50
XTR NW 16 HS	S	PN 400	20	G 3/4" -14	32,0	16	26	26,5	37	27
XTR NW 20 HS	S	PN 250	25	G 1" -11	39,0	18	30	30,0	42	36
XTR NW 25 HS	S	PN 160	30	G 1 1/4" -11	49,0	20	34	35,5	49	41
XTR NW 32 HS	S	PN 160	38	G 1 1/2" -11	55,0	22	39	41,0	57	50

PN = Nominal pressure PB = Max. operating pressure – Series: LL = Very light L = Light S = Heavy – Ø d2 = External pipe diameter

### Product versions

XTR VA	Screw-in fitting, T shaped, Stainless steel
TR	Screw-in fitting, T shaped, Steel