
# XVET VA
Fitting, T shaped

HANSA-FLEX

## Properties

| | |
|---|---|
| **Connection 1** | metric nut thread |
| **Sealing form 1** | Pipe socket with cutting ring |
| **Connection 2 + 3** | metric cylindrical outer thread |
| **Sealing form 2 + 3** | 24° inner cone |
| **Design** | Adjustable direction fitting |
| **Construction** | T shaped |
| **Standard** | DIN 2353<br>ISO 8434-1 |
| **Scope of supply** | Socket (without union nut and cutting ring) pre-assembled |
| **Material** | Stainless steel |



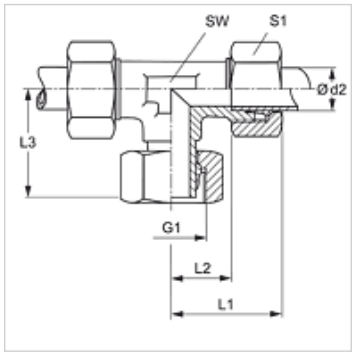


## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

| Identification | Series | Operating pressure | Ø d2 (mm) | G1 | L1 (mm) | L2 (mm) | L3 (mm) | AF (mm) | S1 |
|---|---|---|---|---|---|---|---|---|---|
| **XVET NW 04 HL VA** | L | PN 315 | 6 | M 12 x 1.5 | 27,0 | 12,0 | 27,0 | 12 | 14 |
| **XVET NW 06 HL VA** | L | PN 315 | 8 | M 14 x 1.5 | 29,0 | 14,0 | 27,0 | 12 | 17 |
| **XVET NW 08 HL VA** | L | PN 315 | 10 | M 16 x 1.5 | 30,0 | 15,0 | 28,5 | 14 | 19 |
| **XVET NW 10 HL VA** | L | PN 315 | 12 | M 18 x 1.5 | 32,0 | 17,0 | 29,0 | 17 | 22 |
| **XVET NW 13 HL VA** | L | PN 315 | 15 | M 22 x 1.5 | 36,0 | 21,0 | 32,0 | 19 | 27 |
| **XVET NW 16 HL VA** | L | PN 315 | 18 | M 26 x 1.5 | 40,0 | 23,5 | 35,0 | 24 | 32 |
| **XVET NW 20 HL VA** | L | PN 160 | 22 | M 30 x 2 | 44,0 | 27,5 | 38,0 | 27 | 36 |
| **XVET NW 25 HL VA** | L | PN 160 | 28 | M 36 x 2 | 47,0 | 30,5 | 41,5 | 36 | 41 |
| **XVET NW 32 HL VA** | L | PN 160 | 35 | M 45 x 2 | 56,0 | 34,5 | 51,0 | 41 | 50 |
| **XVET NW 40 HL VA** | L | PN 160 | 42 | M 52 x 2 | 63,0 | 40,0 | 56,0 | 50 | 60 |
| | | | | | | | | | |
| **XVET NW 03 HS VA** | S | PN 630 | 6 | M 14 x 1.5 | 31,0 | 16,0 | 27,0 | 12 | 17 |
| **XVET NW 04 HS VA** | S | PN 630 | 8 | M 16 x 1.5 | 32,0 | 17,0 | 27,0 | 14 | 19 |
| **XVET NW 06 HS VA** | S | PN 630 | 10 | M 18 x 1.5 | 34,0 | 17,5 | 29,5 | 17 | 22 |
| **XVET NW 08 HS VA** | S | PN 630 | 12 | M 20 x 1.5 | 38,0 | 21,5 | 30,5 | 17 | 24 |
| **XVET NW 10 HS VA** | S | PN 630 | 14 | M 22 x 1.5 | 40,0 | 22,0 | 34,5 | 19 | 27 |
| **XVET NW 13 HS VA** | S | PN 400 | 16 | M 24 x 1.5 | 43,0 | 24,5 | 36,0 | 24 | 30 |
| **XVET NW 16 HS VA** | S | PN 400 | 20 | M 30 x 2 | 48,0 | 26,5 | 44,0 | 27 | 36 |
| **XVET NW 20 HS VA** | S | PN 400 | 25 | M 36 x 2 | 54,0 | 30,0 | 49,5 | 36 | 46 |
| **XVET NW 25 HS VA** | S | PN 400 | 30 | M 42 x 2 | 62,0 | 36,5 | 55,0 | 41 | 50 |
| **XVET NW 32 HS VA** | S | PN 315 | 38 | M 52 x 2 | 72,0 | 41,0 | 63,0 | 50 | 60 |

Series: LL = Very light  L = Light  S = Heavy – PN = Nominal pressure  PB = Max. operating pressure – Ø d2 = External pipe diameter

## Product versions

| | |
|---|---|
| **XVET** | Fitting, T shaped, Steel |
| **VET VA** | Fitting, T shaped, Stainless steel |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*