


XVETO

Fitting, T shaped

Properties

Connection 1	metric nut thread
Sealing form 1	24° outer cone with O-ring
Connection 2 + 3	metric cylindrical outer thread
Sealing form 2 + 3	24° inner cone
Design	Adjustable direction fitting
Construction	T shaped
Standard	ISO 8434-1
Scope of supply	Socket (without union nut and cutting ring)
Material	Steel
Surface	electro galvanised

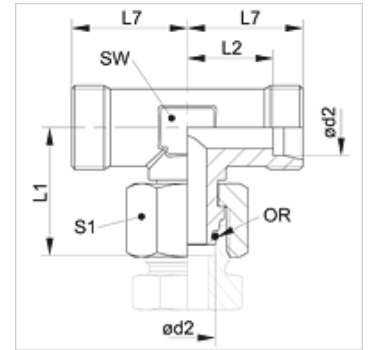

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

Identification	Series	Operating pressure	Ø d2 (mm)	L1 (mm)	L2 (mm)	L7 (mm)	AF (mm)	S1	OR
XVETO NW 04 HL	L	PN 315	6	26,0	12,0	19	12	14	4.0 x 1.5
XVETO NW 06 HL	L	PN 315	8	26,5	14,0	21	12	17	6.0 x 1.5
XVETO NW 08 HL	L	PN 315	10	29,0	15,0	22	14	19	7.5 x 1.5
XVETO NW 10 HL	L	PN 315	12	29,5	17,0	24	17	22	9.0 x 1.5
XVETO NW 13 HL	L	PN 315	15	33,0	21,0	28	19	27	12.0 x 2.0
XVETO NW 16 HL	L	PN 315	18	35,5	23,5	31	24	32	15.0 x 2.0
XVETO NW 20 HL	L	PN 160	22	39,5	27,5	35	27	36	20.0 x 2.0
XVETO NW 25 HL	L	PN 160	28	43,0	30,5	38	36	41	26.0 x 2.0
XVETO NW 32 HL	L	PN 160	35	51,0	34,5	45	41	50	32.0 x 2.5
XVETO NW 40 HL	L	PN 160	42	56,0	40,0	51	50	60	38.0 x 2.5
XVETO NW 03 HS	S	PN 630	6	27,0	16,0	23	12	17	4.0 x 1.5
XVETO NW 04 HS	S	PN 630	8	27,5	17,0	24	14	19	6.0 x 1.5
XVETO NW 06 HS	S	PN 630	10	30,0	17,5	25	17	22	7.5 x 1.5
XVETO NW 08 HS	S	PN 630	12	31,5	21,5	29	17	24	9.0 x 1.5
XVETO NW 10 HS	S	PN 630	14	35,0	22,0	30	19	27	10.0 x 2.0
XVETO NW 13 HS	S	PN 400	16	37,5	24,5	33	24	30	12.0 x 2.0
XVETO NW 16 HS	S	PN 400	20	45,0	26,5	37	27	36	16.3 x 2.4
XVETO NW 20 HS	S	PN 400	25	50,5	30,0	42	36	46	
XVETO NW 25 HS	S	PN 400	30	55,0	35,5	49	41	50	25.3 x 2.4
XVETO NW 32 HS	S	PN 315	38	63,0	41,0	57	50	60	33.3 x 2.4

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

XVETO VA	Fitting, T shaped, Stainless steel
VETO	Fitting, T shaped, Steel