


## Properties

|                           |   |
|---------------------------|---|
| <b>Connection 1</b>       | metric nut thread                           |
| <b>Sealing form 1</b>     | 24° outer cone with O-ring                  |
| <b>Connection 2 + 3</b>   | metric cylindrical outer thread             |
| <b>Sealing form 2 + 3</b> | 24° inner cone                              |
| <b>Design</b>             | Adjustable direction fitting                |
| <b>Construction</b>       | T shaped                                    |
| <b>Standard</b>           | ISO 8434-1                                  |
| <b>Scope of supply</b>    | Socket (without union nut and cutting ring) |
| <b>Material</b>           | Steel                                       |
| <b>Surface</b>            | electro galvanised                          |

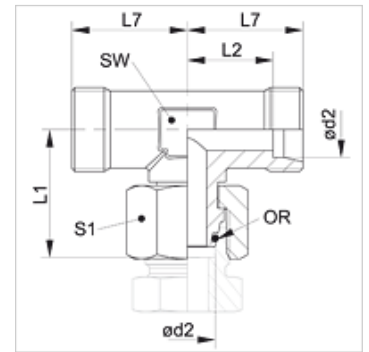

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

| Identification | Series | Operating pressure | Ø d2 (mm) | L1 (mm) | L2 (mm) | L7 (mm) | AF (mm) | S1 | OR         |
|----------------|--------|--------------------|-----------|---------|---------|---------|---------|----|------------|
| XVETO NW 04 HL | L      | PN 315             | 6         | 26,0    | 12,0    | 19      | 12      | 14 | 4.0 x 1.5  |
| XVETO NW 06 HL | L      | PN 315             | 8         | 26,5    | 14,0    | 21      | 12      | 17 | 6.0 x 1.5  |
| XVETO NW 08 HL | L      | PN 315             | 10        | 29,0    | 15,0    | 22      | 14      | 19 | 7.5 x 1.5  |
| XVETO NW 10 HL | L      | PN 315             | 12        | 29,5    | 17,0    | 24      | 17      | 22 | 9.0 x 1.5  |
| XVETO NW 13 HL | L      | PN 315             | 15        | 33,0    | 21,0    | 28      | 19      | 27 | 12.0 x 2.0 |
| XVETO NW 16 HL | L      | PN 315             | 18        | 35,5    | 23,5    | 31      | 24      | 32 | 15.0 x 2.0 |
| XVETO NW 20 HL | L      | PN 160             | 22        | 39,5    | 27,5    | 35      | 27      | 36 | 20.0 x 2.0 |
| XVETO NW 25 HL | L      | PN 160             | 28        | 43,0    | 30,5    | 38      | 36      | 41 | 26.0 x 2.0 |
| XVETO NW 32 HL | L      | PN 160             | 35        | 51,0    | 34,5    | 45      | 41      | 50 | 32.0 x 2.5 |
| XVETO NW 40 HL | L      | PN 160             | 42        | 56,0    | 40,0    | 51      | 50      | 60 | 38.0 x 2.5 |
| XVETO NW 03 HS | S      | PN 630             | 6         | 27,0    | 16,0    | 23      | 12      | 17 | 4.0 x 1.5  |
| XVETO NW 04 HS | S      | PN 630             | 8         | 27,5    | 17,0    | 24      | 14      | 19 | 6.0 x 1.5  |
| XVETO NW 06 HS | S      | PN 630             | 10        | 30,0    | 17,5    | 25      | 17      | 22 | 7.5 x 1.5  |
| XVETO NW 08 HS | S      | PN 630             | 12        | 31,5    | 21,5    | 29      | 17      | 24 | 9.0 x 1.5  |
| XVETO NW 10 HS | S      | PN 630             | 14        | 35,0    | 22,0    | 30      | 19      | 27 | 10.0 x 2.0 |
| XVETO NW 13 HS | S      | PN 400             | 16        | 37,5    | 24,5    | 33      | 24      | 30 | 12.0 x 2.0 |
| XVETO NW 16 HS | S      | PN 400             | 20        | 45,0    | 26,5    | 37      | 27      | 36 | 16.3 x 2.4 |
| XVETO NW 20 HS | S      | PN 400             | 25        | 50,5    | 30,0    | 42      | 36      | 46 |            |
| XVETO NW 25 HS | S      | PN 400             | 30        | 55,0    | 35,5    | 49      | 41      | 50 | 25.3 x 2.4 |
| XVETO NW 32 HS | S      | PN 315             | 38        | 63,0    | 41,0    | 57      | 50      | 60 | 33.3 x 2.4 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

## Product versions

|                 |                                    |
|-----------------|------------------------------------|
| <b>XVETO VA</b> | Fitting, T shaped, Stainless steel |
| <b>VETO</b>     | Fitting, T shaped, Steel           |