


XVETO VA

Fitting, T shaped

Properties

| | |
|---------------------------|---|
| Connection 1 | metric nut thread |
| Sealing form 1 | 24° outer cone with O-ring |
| Connection 2 + 3 | metric cylindrical outer thread |
| Sealing form 2 + 3 | 24° inner cone |
| Design | Adjustable direction fitting |
| Construction | T shaped |
| Standard | ISO 8434-1 |
| Scope of supply | Socket (without union nut and cutting ring) |
| Material | Stainless steel |

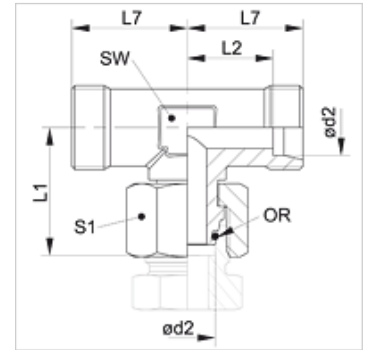

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Ordering information

Seals of NBR
FPM (Viton) on request

Item

| Identification | Series | Operating pressure | Ø d2 (mm) | L1 (mm) | L2 (mm) | L7 (mm) | AF (mm) | S1 | OR |
|-------------------|--------|--------------------|-----------|---------|---------|---------|---------|----|------------|
| XVETO NW 04 HL VA | L | PN 315 | 6 | 26,0 | 12,0 | 19 | 12 | 14 | 4.0 x 1.5 |
| XVETO NW 06 HL VA | L | PN 315 | 8 | 27,5 | 14,0 | 21 | 12 | 17 | 6.0 x 1.5 |
| XVETO NW 08 HL VA | L | PN 315 | 10 | 29,0 | 15,0 | 22 | 14 | 19 | 7.5 x 1.5 |
| XVETO NW 10 HL VA | L | PN 315 | 12 | 29,5 | 17,0 | 24 | 17 | 22 | 9.0 x 1.5 |
| XVETO NW 13 HL VA | L | PN 315 | 15 | 32,5 | 21,0 | 28 | 19 | 27 | 12.0 x 2.0 |
| XVETO NW 16 HL VA | L | PN 315 | 18 | 35,5 | 23,5 | 31 | 24 | 32 | 15.0 x 2.0 |
| XVETO NW 20 HL VA | L | PN 160 | 22 | 38,5 | 27,5 | 35 | 27 | 36 | 20.0 x 2.0 |
| XVETO NW 25 HL VA | L | PN 160 | 28 | 41,5 | 30,5 | 38 | 36 | 41 | 26.0 x 2.0 |
| XVETO NW 32 HL VA | L | PN 160 | 35 | 51,0 | 34,5 | 45 | 41 | 50 | 32.0 x 2.5 |
| XVETO NW 40 HL VA | L | PN 160 | 42 | 56,0 | 40,0 | 51 | 50 | 60 | 38.0 x 2.5 |
| XVETO NW 03 HS VA | S | PN 630 | 6 | 27,0 | 16,0 | 23 | 12 | 17 | 4.0 x 1.5 |
| XVETO NW 04 HS VA | S | PN 630 | 8 | 27,5 | 17,0 | 24 | 14 | 19 | 6.0 x 1.5 |
| XVETO NW 06 HS VA | S | PN 630 | 10 | 30,0 | 17,5 | 25 | 17 | 22 | 7.5 x 1.5 |
| XVETO NW 08 HS VA | S | PN 630 | 12 | 31,0 | 21,5 | 29 | 17 | 24 | 9.0 x 1.5 |
| XVETO NW 10 HS VA | S | PN 630 | 14 | 35,0 | 22,0 | 30 | 19 | 27 | 10.0 x 2.0 |
| XVETO NW 13 HS VA | S | PN 400 | 16 | 36,5 | 24,5 | 33 | 24 | 30 | 12.0 x 2.0 |
| XVETO NW 16 HS VA | S | PN 400 | 20 | 44,5 | 26,5 | 37 | 27 | 36 | 16.3 x 2.4 |
| XVETO NW 20 HS VA | S | PN 400 | 25 | 50,0 | 30,0 | 42 | 36 | 46 | 20.3 x 2.4 |
| XVETO NW 25 HS VA | S | PN 400 | 30 | 55,0 | 35,5 | 49 | 41 | 50 | 25.3 x 2.4 |
| XVETO NW 32 HS VA | S | PN 315 | 38 | 63,0 | 41,0 | 57 | 50 | 60 | 33.3 x 2.4 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter

Product versions

| | |
|----------------|------------------------------------|
| XVETO | Fitting, T shaped, Steel |
| VETO VA | Fitting, T shaped, Stainless steel |