

FFM

Locking socket, French series

Properties

Connection 1 metric nut thread


Sealing form 1 24° outer cone

Design Cap

Construction type French series

Material Steel

Surface electro galvanised

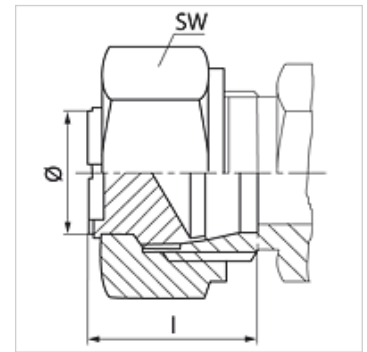

Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

Item

| Identification | Operating pressure | External pipe Ø (mm) | M | L (mm) | AF (mm) |
|------------------|--------------------|-------------------------|------------|-----------|------------|
| FFM NW 13 | PN 250 | 16,75 | M 24 x 1.5 | 20 | 30 |
| FFM NW 16 | PN 250 | 21,25 | M 30 x 1.5 | 21 | 36 |
| FFM NW 20 | PN 250 | 26,75 | M 36 x 1.5 | 22 | 46 |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø = External pipe diameter