

# FFM

## Locking socket, French series

### Properties

**Connection 1** metric nut thread


**Sealing form 1** 24° outer cone

**Design** Cap

**Construction type** French series

**Material** Steel

**Surface** electro galvanised

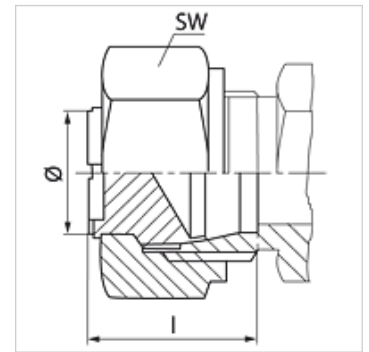

### Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

### Item

| Identification   | Operating pressure | External pipe Ø (mm) | M          | l (mm) | AF (mm) |
|------------------|--------------------|----------------------|------------|--------|---------|
| <b>FFM NW 13</b> | PN 250             | 16,75                | M 24 x 1.5 | 20     | 30      |
| <b>FFM NW 16</b> | PN 250             | 21,25                | M 30 x 1.5 | 21     | 36      |
| <b>FFM NW 20</b> | PN 250             | 26,75                | M 36 x 1.5 | 22     | 46      |

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø = External pipe diameter