


# VMK MG

## Screw in fitting

### Properties

<b>Connection 1</b>	metric conical outer thread
<b>Sealing form 1</b>	thread seal
<b>Connection 2</b>	metric cylindrical outer thread
<b>Sealing form 2</b>	24° inner cone
<b>Design</b>	Screw-in fitting
<b>Construction</b>	straight
<b>Standard</b>	DIN 2353 ISO 8434-1
<b>Scope of supply</b>	Socket with union nut and cutting ring
<b>Material</b>	Brass

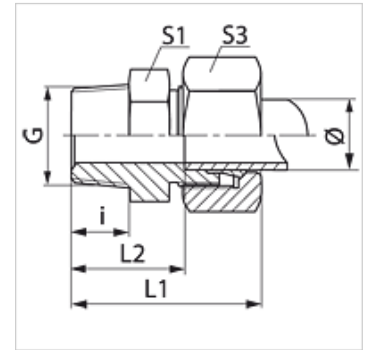

### Item

Identification	Series	Operating pressure	External pipe Ø (mm)	G	i (mm)	L1 (mm)	L2 (mm)	S1	S3
<b>VM 04 LL MG</b>	LL	PN 63	4	M 8 x 1 K	8	26,0	16,0	11	10
<b>VM 06 LL MG</b>	LL	PN 63	6	M 10 x 1 K	8	26,0	14,5	11	12
<b>VM 08 LL MG</b>	LL	PN 63	8	M 10 x 1 K	8	28,0	16,5	12	14

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø = External pipe diameter

### Product versions

<b>VMK</b>	Screw-in fitting, Steel
<b>VMK VA</b>	Screw in fitting, Stainless steel