

# K HF

Fitting, cross shaped, French series

**HANSA FLEX**

## Properties

**Connection 1 - 4** metric cylindrical outer thread

**Sealing form 1 - 4** 24° inner cone

**Design** Fitting


**Construction type** French series

**Construction** K shaped

**Scope of supply** Socket with union nut and cutting ring

**Material** Steel

**Surface** electro galvanised

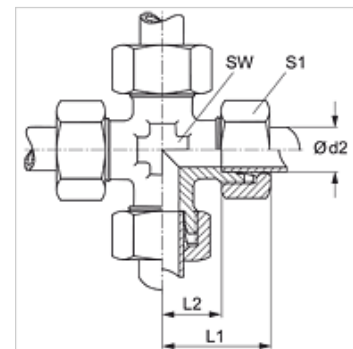

## Note

Information about fitting, installation, pressure loads and permissible operating temperatures can be found in the technical information for pipe fittings.

## Item

Identification	Operating pressure	Ø d2 (mm)	L1 (mm)	L2 (mm)	AF (mm)	S1
K NW 10 HF	PN 400	13,25	38,5	16	19	27
K NW 13 HF	PN 250	16,75	41,5	18	24	30
K NW 16 HF	PN 250	21,25	47,0	23	30	36

Series: LL = Very light L = Light S = Heavy – PN = Nominal pressure PB = Max. operating pressure – Ø d2 = External pipe diameter